

performance-presentation

t620

t621 projection camera

2,400 ANSI-lumens

ECO-mode



A strong argument!


TOSHIBA

t621 projection camera t620



Enthusiastic specification

- High performance due to Micro-Lens-Array Technology (MLA).
- The Eco-Mode reduces the operating noise and increases the operating hours of the lamp.
- User-friendly On-Screen-Display.
- The additional monitor output allows the display of an additional image.

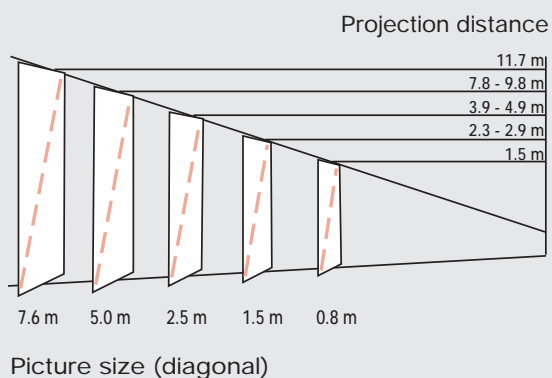

Display	3 x 0.9" polysilicium TFT (MLA)
Resolution	XGA 1,024 x 768
Brightness	2,400 ANSI-lumens
Colour reproduction	16.7 mio. colours
Contrast	400:1
Picture format	4:3
Lamp	190 W lamp
Frequency (horiz./vertical)	15 - 93 kHz / 50 - 85 Hz
Lens	F = 1.9 - 2.3 / f = 35.6 - 44.5 mm, 1.25 x manual zoom and focus
Throw ratio	1.47 - 1.87:1
Digital keystone correction	vertical +/- 15 degrees
Picture size (diagonal)	0.8 - 7.6 m
Projecting distance	1.5 - 11.74 m
Input signal	NTSC/PAL/SECAM, HDTV & DTV, DVD, VGA/SVGA/XGA/SXGA & UXGA (comp.)
Inputs	2 x RGB (D-sub 15), 2 x video (RCA, S-video), 2 x audio (RCA, stereo mini jack)
Outputs	1 x RGB (D-sub 15)
Serial interface	RS-232C, USB
Wireless communication	-
Power supply	AC 100 - 240 V, 50/60 Hz
Loudspeaker	yes
Dimensions (W x H x D)	t620: 298 x 97 x 249 mm / t621: 298 x 97 x 313 mm
Weight	t620: 3.3 / t621: 4.0 kg
Extras	ECO-mode, freeze-function
Accessories	remote control with laserpointer, batteries, owner's manual, CD-ROM, quick reference, power cord, RGB-, audio-, AV- und USB-cable, mouse-remote- receiver, softcase
Options	ceiling-mounting, trolley
Projection Camera (t621)	1/3" CCD, 810.000 pixels, F = 2.8 / Af = 3.4 mm, manual zoom and focus, overlay and gain