

TOSHIBA



Impressive Brightness – small format

- ECO mode reduces the operating noise and expands the lamp life
- Perfect combination: extremely mobile and bright
- Digital keystone correction

p8




*DLP™ is a registered trademark of Texas Instruments



p8

Feather light and easy to use.

- Display** 0.7" DLP™ Chip
- Resolution** XGA 1,024 x 768
- Brightness** 1,500 ANSI-lumens
- Colour reproduction** 16.7 mio. colours
- Contrast** 2,100:1
- Projection format** 4:3 switchable to 16:9
- Lamp** 156 W (TLPLP8LAMP)
- Max. lamp life** up to max. 2,000 hours / up to max. 3,000 hours in ECO mode
- Lens** F = 2.7 - 2.88 / f = 28.43 - 32.73 mm
- Zoom ratio** 1.15 x
- Frequencies (hor./vert.)** 31.5 - 80 kHz / 56 - 85 Hz
- Projection** front and rear
- Digital keystone correction** vertical +/- 15°
- Picture size (diagonal)** 0.81 m - 7.62 m
- Projection distance** 1.5 m - 12.2 m
- Input signal** NTSC/PAL/SECAM 480i, 480p, 525i, 525p, 720p, 1,080i, VGA, SVGA, XGA, SXGA (compr.)
- Inputs** 1 x RGB (D-sub 15), 1 x S-video, 1 x RCA, control: USB
- Outputs** -
- Serial interface** USB for mouse remote
- Power supply** AC 100 - 240V, 50/60 Hz
- Loudspeaker** -
- Dimensions (W x H x D)** 200 x 75.3 x 154.2 mm
- Weight** 1.0 kg
- Operation noise** normal 36 dB / ECO mode 34 dB
- Specials** ECO mode, digital keystone correction, kensington-lock
- Accessories** remote control with laserpointer and batteries, owners manual (CD ROM), audio-, S-video-, RGB- and power cable, softcase
- Options** trolley, spare lamp, camera c001

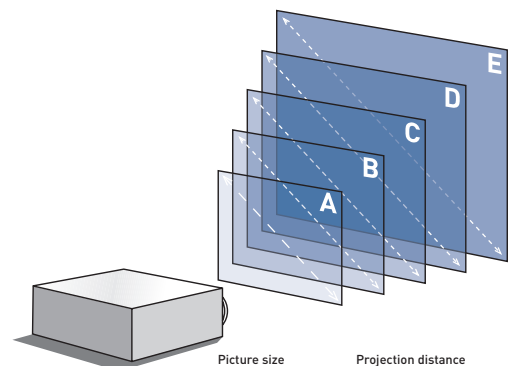

Picture size	Projection distance
A 0.64-0.94 m	1.5 m
B 1.63-1.87 m	3.0 m
C 2.71-3.12 m	5.0 m
D 3.80-4.37 m	7.0 m
E 6.63-7.62 m	12.0 m