
Vision Model 60

D-ILA™ PROJECTOR

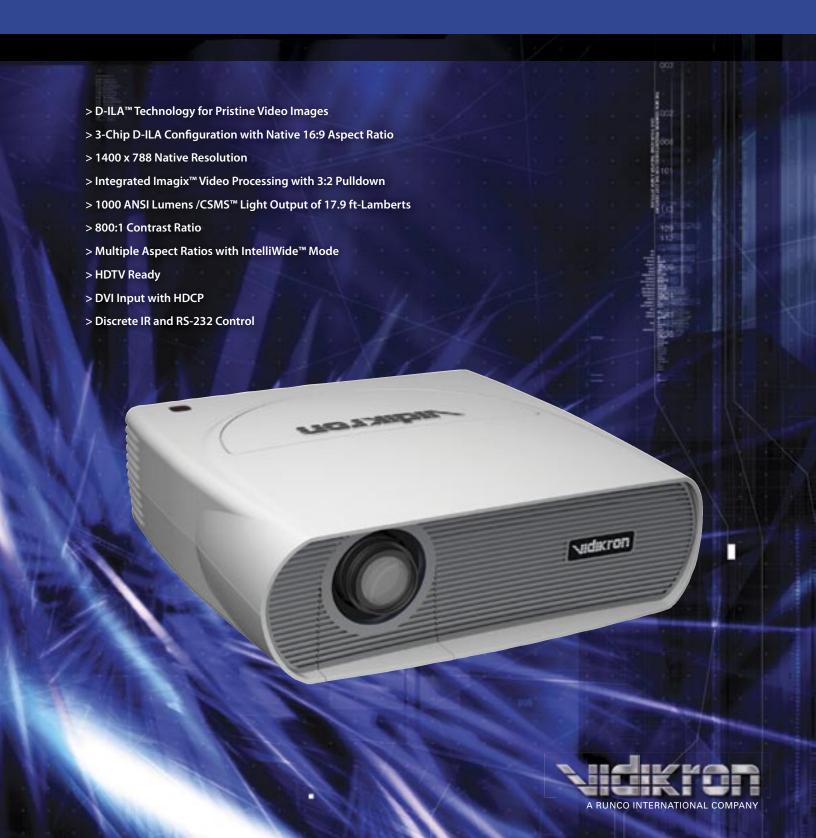

Vision Model 60

D-ILA™ PROJECTOR

Vidikron raises the bar again in high quality, home theater video performance with the Vision™ Model 60. Vidikron engineers have designed this product with the implementation of advanced, D-ILA™ (Direct Drive Image Light Amplifier) technology. This exciting technology is capable of producing some of the most natural, smooth images available in digital projection. Tremendous detail, richly saturated colors and outstanding black level reproduction are hallmarks of the Model 60.

The Model 60's optical light engine design and Vidikron's incorporation of three D-ILA chips, rather than a lower cost one-chip design, result in exceptionally low noise without the flicker and "rainbow effect" that often plague one-chip digital video display devices. Vidikron engineers have also paid careful attention to accurate gray scale tracking and true 6500K color reproduction capability. Together, all of these engineering achievements produce the most pleasing and film-like high resolution pictures imaginable.

With 1000 ANSI lumens of light output (CSMS™ Light Output of 17.9 ft-Lamberts) and an 800:1 contrast ratio, the Model 60 offers state-of-the-art picture quality on screens as large as eight feet wide. Vidikron's outstanding Imagix™ video processing with 3:2 film detection circuitry and the Model 60's full HDTV compatibility (with outboard tuner/decoder or satellite receiver) make it versatile enough to handle every video source.

In addition, Vidikron's multiple aspect ratio control includes its unique IntelliWide™ mode for viewing standard video formats in widescreen without loss of image quality. Discrete IR and RS-232 control make custom installation seamless, while discrete source and aspect ratio selection accommodate any automation control system.

Finally, the Vision Model 60 is packaged in stunning, Italian inspired styling and finished in a soft white to blend seamlessly with any decor.

Specifications for Vision Model 60:

Projection Type:	D-ILA, 3-Chip, 0.7	in. diagonal
------------------	--------------------	--------------

Native Resolution: 1400 x 788 (16:9)

Aspect Ratio: 4:3, Letterbox, 16:9 Anamorphic,

IntelliWide™

Video Standards: NTSC, PAL

DTV Compatibility: 480p, 720p, 1080i

Scan Frequency: Horizontal: 15 – 120KHz

Vertical: 50—120Hz

Picture Size: Recommended Width: 72 – 96 in. (16:9 screen) Maximum Width: 240 in. (16:9 screen)

(16:9 screen) Maximum Width: 240 in. (16:9 screen)
Light output: CSMS* Specifications: Home Theater

Calibration: 487 ANSI Lumens; 17.9 Foot-Lamberts (fL);

1000 ANSI Lumens 800:1 ANSI

Contrast Ratio: 800:1 ANS Lamp: 250 W

Estimated Lamp Life: 2000 hours @ 6500° Kelvin

Inputs: (1) Composite Video, (1) S-video,

(1) RGB/Component (via BNC),

(1) RGB (15-pin mini D-sub),

(1) DVI w/ HDCP, (1) RS-232

(1) 1/8 in. mini stereo audio

12V Output: Max .100 Amp, active when the

projector is on

Power Requirements: 100 – 240V AC, 340W

Operating Environment: $40^{\circ} - 95^{\circ}$ F, $(5^{\circ} - 35^{\circ}$ C)

Dimensions (w/feet): Width: 18 in. (457.2 mm) Depth: 20 1/8 in. (511.18 mm)

Height: 6 in. (152.4 mm)
Weight: 40 lbs. (18.14 kg)

Regulatory Approvals: FCC, CE, C-Tick

Limited Warranty: Projector: (2) Two year parts and labor

from the date of delivery to the end user Lamp Warranty: 1000 hours or (6) six months, which ever comes first.

All specifications subject to change without notice. Optional ceiling bracket available. * Cinema Standards Measurement System. See www.vidikron.com for more details.



Vidikron

2900 Faber Street, Union City, CA 94587 510-324-5900 Fax 510-324-5905 www.vidikron.com

© 2004 Vidikron, a Runco International Company. All rights reserved. Vision, Imagix, IntelliWide, and CSMS are trademarks of Vidikron.

D-ILA is a registered Trademark of Victor Company of Japan, Limited.