

Vidikron VPF 40GL



Display Type



7" ESF CRT
4/3 Elektrostatisch Fokussierte Röhre

Ansi-Lumen

Projector

200 / 650 Peak Lumen

Screen

67 Lux (bei 200 cm Screen)

Contrast

-

Black Level

-

Offset

-

Resolution

-

Video Modes

NTSC SECAM PAL

Application

CRT Projection | Very narrow picture width and rooms with very little light.

Light Source

CRT Röhre SD-130

Light Life

ca. 10000 - 20000 h. (je nach Anwendung)

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

Tac 4

Throw Ratio

-

Audio

2 x 10W

2 x Video mit stereo audio

S-Video

D-sub 15pin

Variable stereo audio line level out

12V Trigger

Ceiling Mounting

Yes

Power

-

Size WxHxD

560 x 225 x 725 mm (22"x8,9"x28,5") 91,35 L/dm³

Operating Noise

-

Weight

30,90 kg / 68,12 lbs.

Keystone

-

Illumination

-

Frequenz

H-sync: 15,6-16 kHz

V-sync: 50-60 Hz

Range max.: 7,5 MHz

Foot-Lamberts

6 fL / max. 123 cm screen width

21 cd/m²


Features

■ Housing designed by Ferrari, analogue convergence

Status

- Discontinued (EOL) // Last update of the data: 2023-08-04

Data

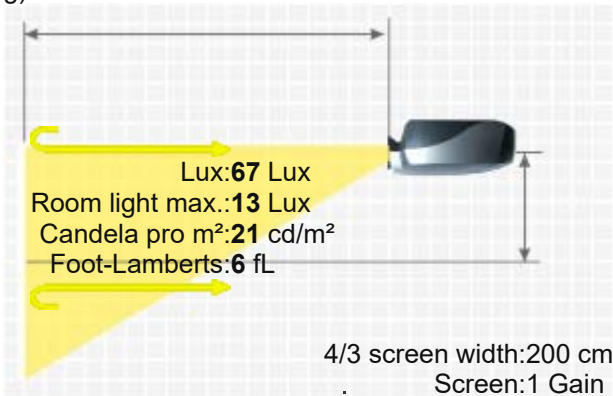



HCinema

<https://www.projector-database.com/pro/vidikronvpf40gl-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.