

Key Features

SuperColor: Amazing Color Accuracy | 3,600 Lumen

Brightness | Energy Efficient SuperEco | Reduced Input


Latency



Product Description

The ViewSonic® PA503W price-performance projector features 3,600 lumens, native WXGA 1280x800 resolution, and an intuitive, user-friendly design. Exclusive SuperColor™ technology offers a wider color range for lifelike image projection. The PA503W also features extensive connectivity including HDMI, 2 x VGA in, Composite Video, 1 x VGA output, and Audio in/out. An energy-saving SuperEco™ feature reduces power consumption by up to 70%, and extends the lamp life by up to 10,000 hours*. With advanced audiovisual features, flexible connectivity options, and an affordable price, the PA503W is ideal for use in education and small business environments.

*Energy consumption and lamp life may vary based on actual usage and other factors.

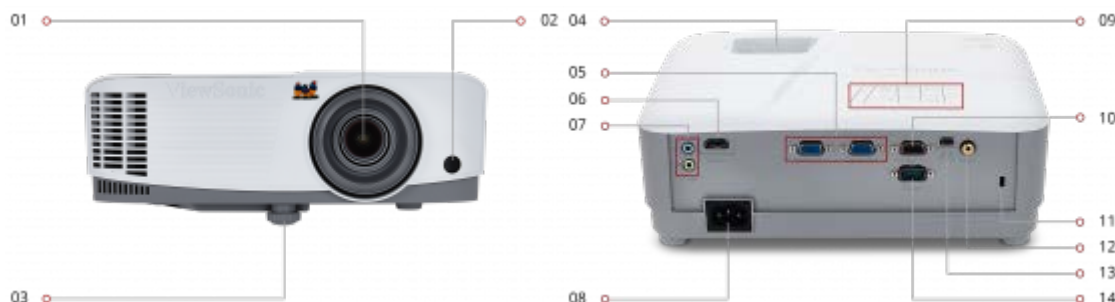


1. Projection lens
2. IR remote sensor
3. Elevation foot
4. Focus / zoom rings
5. VGA x2
6. HDMI
7. Audio In/Out
8. AC In
9. Control Panel
10. Monitor Out
11. Kensington® Lock Slot
12. Video In
13. USB type Mini
14. RS232



1280 x 800
RESOLUTION



3,600
LUMENS



1.55~1.70
THROW
RATIO

Contact Sales

call: 888.881.8781

email:

salesinfo@viewsonic.com

visit: viewsonic.com

Display:

Type:	DLP
Resolution Type:	WXGA
Resolution:	1280 x 800
Brightness (ANSI Lumens):	3,600
Throw Distance:	1m-10.98m(100" @3.34m)
Throw Ratio:	1.55~1.70

Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m
Keystone:	Vertical ($\pm 40^\circ$)
Lens:	1.1x optical zoom
Light Source (watt):	200
Light Source Life, Normal (hours):	5000
Light Source Life, Dynamic Eco-Mode (hours):	10000
Color Depth:	1.07B Color (R/G/B 10bit)
Dynamic Contrast Ratio:	22000:1
Aspect Ratio:	16:9

Video Signal:

Frequency Horizontal:	15K~102KHz
-----------------------	------------

Compatibility:

PC Resolution (max):	VGA(640 x 480) to FullHD(1920 x 1080)
Mac® Resolution (max):	VGA(640 x 480) to FullHD(1920 x 1080)

Connector:

3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS232)(1), HDMI(1), VGA In(2), VGA Out(1), Composite RCA Video In(1), Mini USB(1)

Audio:

Internal Speakers:	2W
--------------------	----

Power:

Voltage:	100-240V+/- 10%, 50/60Hz AC
Consumption (typical):	260W
Stand-by:	<0.5W

Operating Conditions:

Temperature:	32-104° F (0–40° C)
--------------	---------------------

Weight (imperial):

Net (lbs):	4.89
Gross (lbs):	7.14

Weight (metric):

Net (kg):	2.2
Gross (kg):	3.24

Dimensions (imperial) (WxHxD):

Packaging (in.):	14.37 x 11.81 x 7.4
Physical (in.):	11.57x 8.58 x 4.33

Dimensions (metric) (WxHxD):

Packaging (mm):	365 x 300 x 188
Physical (mm):	294 x 218 x 110mm

General:

Regulations: FCC (including ICES003), cTUVus, NOM, TUV-Rheinland S Mark

PACKAGE CONTENTS: PA503W projector, power cable, VGA cable, laser remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)

Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service**

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907904918

Accessories:

--