

Key Features

5,000 Lumen Brightness | Vertical Lens Shift with

Centered Lens | PortAll[®]: Discreet Wireless Streaming |

Network Monitoring & Control | SuperColor™: Amazing


Color Accuracy



Product Description

Delivering 1280 x 800 resolution and 5000 lumens of brightness, the ViewSonic[®] PG800W is the ideal WXGA projector for professional installations, large venues, and business and education environments. With its 1.3x optical zoom, centered lens, vertical lens shift, and vertical keystoning, the PG800W provides extreme flexibility even in the most challenging installations. The PG800W boasts a sleek top cover design for quick lamp and accessory access, while an intuitive PortAll[®] compartment accommodates additional accessories such as an HDBaseT receiver, wireless streaming device, or PC stick. A 4-in-1 power button serves as a central point for LED notifications. Moreover, two HDMI ports and additional audio and video ports allow for extensive connectivity to handle multiple devices without the need to switch cables.

Powered by SuperColorTM technology for beautiful image reproduction, and SonicExpert[®] technology for incredibly clear sound, the PG800W delivers a professional audiovisual performance.

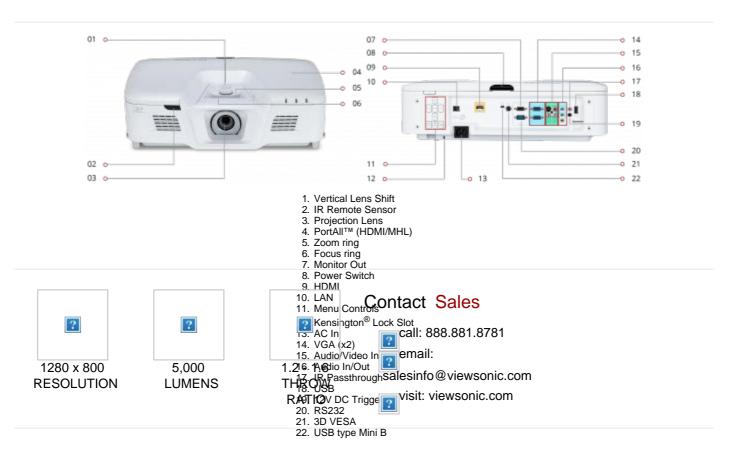

Display:

Type:	DLP
Resolution Type:	WXGA
Resolution:	1280 x 800
Brightness (ANSI Lumens):	5,000

Throw Distance: 2.6 - 33.3 ft / 0.78 - 10.14 m Throw Ratio: 1.2 - 1.6 Display Size (in.): 30 - 300 in. / 0.76 - 7.62 m Keystone: Vertical (± 40°) 1.3x Manual optical zoom / manual Lens: optical focus Light Source (watt): 370 Light Source Life, Normal (hours): 2000 Light Source Life, Dynamic Eco-2500 Mode (hours): 1.07B Color (R/G/B 10bit) Color Depth: Dynamic Contrast Ratio: 50,000:1 16:10 Aspect Ratio: Video Signal: 15K~102KHz Frequency Horizontal: 23~120Hz Frequency Vertical: Compatibility: PC Resolution (max): 1920 x 1200 1920 x 1200 Mac® Resolution (max): Connector: USB 2.0 Type A(1), USB 2.0 Type B(1), Ethernet LAN (RJ45)(1), 3.5mm 12V Trigger(1), 3.5mm Audio Out(1), 3.5mm Audio In(2), Control (RS232) (1), HDMI(2), VGA In(2), VGA Out(1), Composite RCA Video In(1), S-Video In(1), Mini USB(1), RCA Audio In (L/R)(1), 3D VESA(1), IR out(1) Audio: Internal Speakers: 10W (x2) Power: Voltage: 100-240V+/- 10%, 50/60Hz AC 574W Consumption (max): <0.5W Stand-by: Controls: Power, keystone/arrow keys, **Physical Controls:** left/blank, menu/exit, right/panel key lock, mode/enter, auto, source Display, Image, Power Management, Basic, Advanced, On Screen Display: System, Information (See user guide for full OSD functionality) **Operating Conditions:** Temperature: 32-104° F (0 - 40° C) Humidity (non-condensing): 0-90% Additional Hardware: Kensington Lock Slot: Copyright © ViewSonic Corporation 2000-2018. All rights reserved. (01/13/2018 05:39 AM PST) Weight (imperial): Net (lbs): 13.7 Gross (lbs): 18.7 Weight (metric): Net (kg): 6.2 Gross (kg): 8.5 Dimensions (imperial) (WxHxD): Packaging (in.): 22.7 x 21.1 x 10.2 Physical (in.): 18.5 x 12.4 x 5.5 Dimensions (metric) (WxHxD): Packaging (mm): 577 x 537 x 260 Physical (mm): 470 x 316 x 140

PACKAGE CONTENTS: PG800W projector, power cable, VGA cable,

General:

Regulations: FCC, ROHS, cTUVus

remote control with AAA batteries, Quick Start Guide

Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service**

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

Classification: Discontinued

UPC: 766907934014

Accessories:

PGD-350, PJ-SCW-1001W, PJ-WMK-006, PM-FCP, RLC-103, VC10