


## Key Features

5,500 Lumen Brightness | Vertical/Horizontal Lens Shift  
with Centered Lens | Stackable Design | 360-degree  
Installation | SuperColor: Amazing Color Accuracy



## Product Description

Bright and versatile for any professional installation, the ViewSonic® Pro9800WUL WUXGA projector delivers everything you need for big screens in big venues. Delivering 5,500 lumens of advanced high brightness, this projector is ideal for auditoriums, large boardrooms, houses of worship, and more. Thanks to SuperColor™ technology, content is brought to life with captivating color, crisp graphics, and stunning videos no matter the environment. Designed for installers, this top-notch performer is also easy to deploy and manage with its wide 1.7x optical zoom adjustment, a centered lens design, and a vertical/horizontal lens shift feature that provides extreme flexibility in even the most challenging installations. Thanks to the stackable design of these projectors, light output can be doubled by simply placing one projector on top of the other - perfect for large venues with high ambient light.

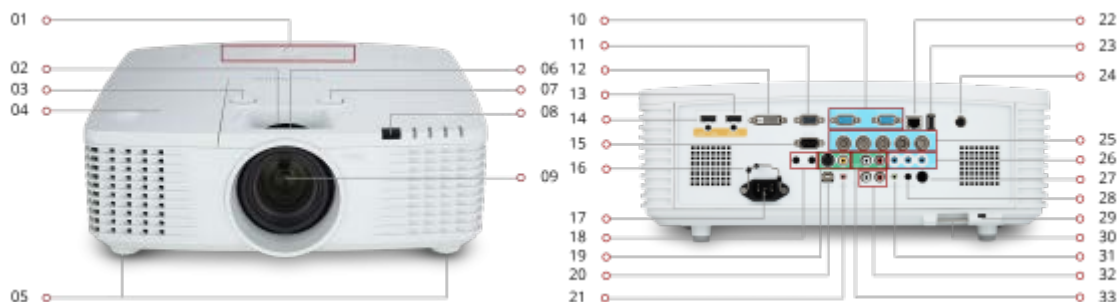

1. Menu Controls
2. Zoom Ring
3. Horizontal Lens Shift
4. Lamp Access
5. Elevation Feet
6. Focus ring
7. Vertical Lens Shift
8. IR Remote Sensor
9. Projection Lens
10. VGA (x2)
11. Monitor Out
12. DVI-D
13. HDMI In
14. HDMI/MHL In
15. RS232
16. Power Cable In
17. AC In
18. Video/S-Video In
19. Wired Remote In
20. Service Port
21. Mic In
22. LAN
23. USB 2.0 Type A
24. 3D VESA
25. BNC In
26. PC Audio In
27. IR In/Out
28. 12V DC Trigger
29. Kensington Lock Slot
30. Security Bar
31. Audio Out
32. RCA Audio Out
33. RCA Audio In

Contact Sales

call: 888.881.8781

email:

[salesinfo@viewsonic.com](mailto:salesinfo@viewsonic.com)

visit: [viewsonic.com](http://viewsonic.com)

1920 x 1200  
RESOLUTION

5,500  
LUMENS

1.25 - 2.13:1  
THROW RATIO

### Display:

Throw Distance: 4 - 55.8 ft / 1.2 - 17m

Throw Ratio: 1.25 - 2.13:1

Type: DLP

Lens: 1.7x Manual optical zoom / manual optical focus

Lens Shift: Vertical (-12.1%/+20.8%) / Horizontal (+/- 10.3%)

|  |                                       |
|--|---------------------------------------|
| Keystone:                                    | Vertical (± 30°) / Horizontal (± 30°) |
| Light Source (watt):                         | 370                                   |
| Light Source Life, Normal (hours):           | 1500                                  |
| Light Source Life, Dynamic Eco-Mode (hours): | 3500                                  |
| Brightness (ANSI Lumens):                    | 5,500                                 |
| Color Depth:                                 | 30 bits, 1.07B Color (10+10+10)       |
| Resolution:                                  | 1920 x 1200                           |
| Dynamic Contrast Ratio:                      | 15000:1                               |
| Aspect Ratio:                                | 16:10                                 |
| Resolution Type:                             | WUXGA                                 |
| Display Size (in.):                          | 26.2 - 371.4 in. / 0.67 - 9.43m       |

#### Video Signal:

|                       |           |
|-----------------------|-----------|
| Frequency Horizontal: | 15-100kHz |
| Frequency Vertical:   | 24-120Hz  |

#### Compatibility:

|                        |                 |
|------------------------|-----------------|
| PC Resolution (max):   | Up to 1920x1200 |
| Mac® Resolution (max): | Up to 1920x1200 |

#### Connector:

USB 2.0 Type A(1), USB 2.0 Type B(1), Ethernet LAN (RJ45)(1), 3.5mm Audio Out(1), 3.5mm Audio In(3), Control (RS232)(1), HDMI 1.4(1), HDMI MHL(1), DVI-D(1), VGA In(2), VGA Out(1), Composite RCA Video In(1), S-Video In(1), RCA Audio Out(1), 3D VESA(1), Wired Remote In(1), Wired Remote Out(1), 5-BNC(1)

#### Audio:

|                    |         |
|--------------------|---------|
| Internal Speakers: | 7W (x2) |
|--------------------|---------|

#### Power:

|                    |  |
|--------------------|--|
| Voltage:           | 100~240VAC (Auto Switching), 50-60Hz (universal) |
| Consumption (max): | 480W   |
| Stand-by:          | <0.5W  |

#### Controls:

|                    |  |
|--------------------|--|
| Physical Controls: | Power, H/V lens shift, focus, zoom, keystone/arrow keys, left/blank, right/panel key lock, menu/exit, mode/enter, source |
| On Screen Display: | Display, Image, Video, Audio, Basic, Advanced  |

#### Operating Conditions:

|                            |                     |
|----------------------------|---------------------|
| Temperature:               | 41-104° F (5–40° C) |
| Humidity (non-condensing): | 10-85%              |

Copyright © ViewSonic Corporation 2000-2017. All rights reserved. (02/07/2017 05:48 AM PST)

#### Additional Hardware:

|                       |   |
|-----------------------|---|
| Kensington Lock Slot: | 1 |
|-----------------------|---|

#### Weight (imperial):

|              |       |
|--------------|-------|
| Net (lbs):   | 18.26 |
| Gross (lbs): | 27.31 |

#### Weight (metric):

|             |      |
|-------------|------|
| Net (kg):   | 8.29 |
| Gross (kg): | 12.4 |

#### Dimensions (metric) (WxHxD):

|                 |                     |
|-----------------|---------------------|
| Packaging (mm): | 576 x 436 x 291     |
| Physical (mm):  | 445 x 325.5 x 147.8 |

#### Dimensions (imperial) (WxHxD):

|                  |                       |
|------------------|-----------------------|
| Packaging (in.): | 22.68 x 17.17 x 11.46 |
| Physical (in.):  | 17.51 x 12.81 x 5.82  |

#### General:

Regulations: UL, cUL, FCC, CE, EMC, CB, ROHS, REACH, SVCH, WEEE, ErP, Mexico NOM/ENERGY, PSB, RCM, CCC

PACKAGE CONTENTS: Pro9800WUL projector, power cable, VGA cable, laser remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)

Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service\*\*

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907848212

Accessories: