


Vivitar DP 1100S




VIVITAR DP 1100S

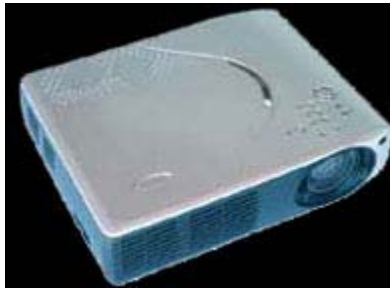

Brief Introduction

Beta 2.5

The Vivitar DP 1100S standard portable LCD projector has 1100 Ansi lumens, a contrast of 400:1 and an SVGA 800 x 600 resolution. As the projector has horizontal and vertical keystone correction, the projector can be set up with plenty of free space in the room. The projector can illuminate a picture width of up to 289 cm well thanks to the 1100 Ansi lumens. In room lighting, however, the picture width should ideally be less than 193 cm. It is no longer available from the manufacturer Vivitar.

 3 x 0,7" LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen

1100

367 Lux (bei 200 cm Screen)

Contrast

400:1

400:1

Black Level

2,7500 min. Lumen

0,924 min. Lumen

Offset

SVGA 800 x 600

Resolution

480.000 Pixel

XGA 1024x768 compressed

Video Modes

Pal, Secam, NTSC

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

150W EHP Lamp

Articel Nr.: DP 1100S

Light Life

1500 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,3

Objective

f=21,5-28 mm

Throw Ratio

1,51-1,97:1

Audio

2 x 1W

Connections

Composite video

S - Video

Component Video

Ceiling Mounting

Yes

Power

210W

Size WxHxD

270 x 70 x 210 mm (10,6"x2,8"x8,3") 3,97 L/dm³

Operating Noise

35dB

Weight

2,60 kg / 5,73 lbs.

Keystone

Vert.: +/-15°

Hori.: +/-10°

Illumination

85%

Frequenz

H-sync: 15-91 kHz



V-sync: 50-85 Hz

Range max.: 157 MHz

Foot-Lamberts

34 fL / max. 289 cm screen width

116 cd/m²

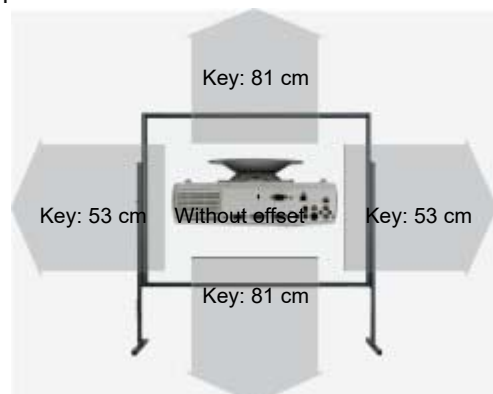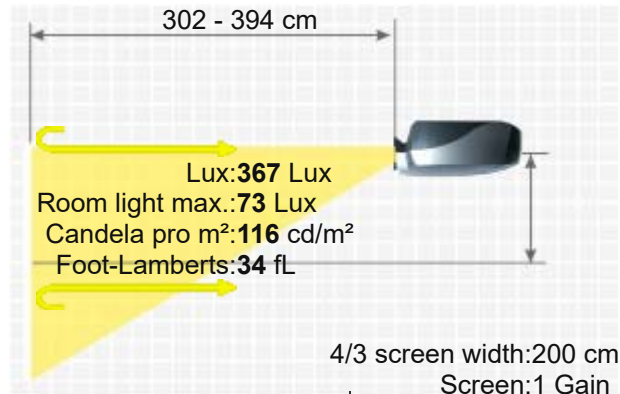

Features
Status
Data

- Picture-in-Picture
- Remote control with laser pointer und mouse control
- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/vivitardp1100s-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.