

Vivitar DP 1200X

VIVITAR DP 1200X



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

The standard portable Vivitar DP 1200X LCD projector has 1300 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. Horizontal and vertical keystone correction makes image adjustment childs play. A picture width of up to 314 cm is possible. However, the picture should be smaller in room light. We recommend max. 209 cm. It is no longer offered by the manufacturer Vivitar.



3 x 0,7 LCD TFT Panel
XGA 4/3 Liquid Crystal Display

1300

400:1 full on/off

3,2500 min. Lumen

433 Lux (bei 200 cm Screen)

400:1 full on/off

1.091 min. Lumen

XGA 1024 x 768
786.432 Pixel

PAL, NTSC, Secam

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

150W EHP Lamp

Articel Nr.: DP 1200X

1500 h.

-

Manual

Manual 1,3

f=21,5-28 mm

1,51-1,97:1

2 x 1W

Cinch Video in
S-Video in
DVI in


-

210W

270 x 70 x 210 mm (10,6"x2,8"x8,3") 3,97 L/dm³

35dB

-

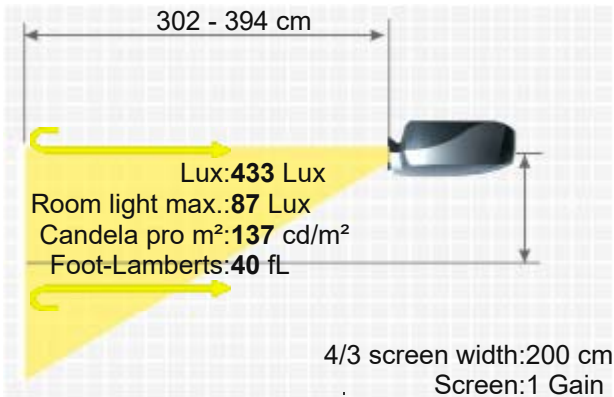

Keystone
Illumination
Frequenz
Foot-Lamberts
Features
Status

Vert.: +/-15°
Hori.: +/-10°
80%
H-sync: 15-91 kHz
V-sync: 50-85 Hz
Range max.: 157 MHz
40 fL / max. 314 cm screen width
137 cd/m²
■ Gamma correction
■ Picture-in-Picture
■ Remote control with laser pointer und mouse control
- Discontinued (EOL) // Last update of the data: 2023-08-04



Data



More Details



HCinema

<https://www.projector-database.com/pro/vivitardp1200x-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.