

Vivitek D625MX



VIVITEK D625MX



Brief Introduction

Beta 2.5

The standard portable Vivitek D625MX DLP projector has 2000 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. An image width of up to 389 cm is possible. However, the image should be smaller in room light. We recommend max. 259 cm. The model was built by Vivitek in 2005 and is no longer current.



1 x 0,7" DDR DDP2000 DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

2000

667 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

1,0000 min. Lumen

0,334 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

200W VIP Lamp

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

-

Throw Ratio

1,64-1,97:1

Audio

1 x 1W

Connections

DVI-I
D-sub 15pin in und out
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack
USB
RS232C

Ceiling Mounting

Yes

Power

300W

Size WxHxD

328 x 88 x 238 mm (12,9"x3,5"x9,4") 6,87 L/dm³

Operating Noise

-

Weight

2,90 kg / 6,39 lbs.

Keystone

Vert.: +/-15°

Illumination



80%

Frequenz

H-sync: 13-70 kHz


Foot-Lamberts

62 fL / max. 389 cm screen width

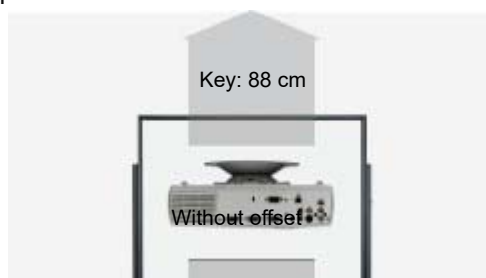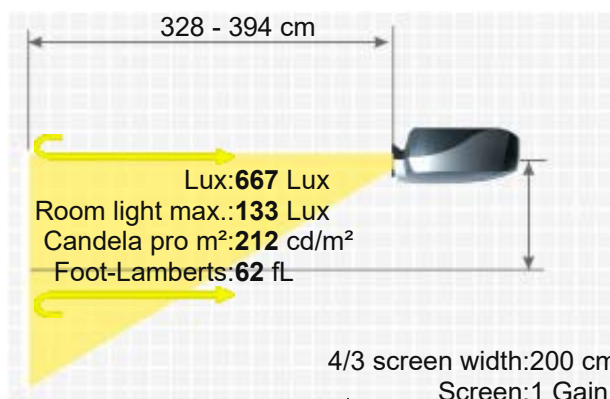

212 cd/m²

Key: 88 cm



Features

- Eco Mode
- Kensington Slot
- De-interlacer with 3:2 2:2 pull down

Status Data

2005 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/vivitek625mx-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.