

# Vivitek D628MX



## Brief Introduction

Beta 2.5

The standard portable Vivitek D628MX DLP projector has 3000 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. The projector can illuminate an image width of up to 477 cm well thanks to the 3000 Ansi lumens. In room light, however, the image width should ideally be less than 318 cm. The model built in 2005 is no longer offered by Vivitek.

## Display Type

 1 x 0,7" DDR DDP2000 DLP Chip  
XGA 4/3 Ti Digital Light Processing Chip

## Ansi-Lumen

Projector 3000

Screen 1000 Lux (bei 200 cm Screen)

## Contrast

2000:1 full on/off

Screen 2000:1 full on/off

## Black Level Offset

1,5000 min. Lumen

Screen 0,501 min. Lumen

## Resolution

XGA 1024 x 768

## Video Modes

786.432 Pixel

SXGA 1280 x 1024 compressed

## Application

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

## Light Source

-

## Light Life

-

## Operating Costs

-

## Focus

-

## Zoom

-

## Objective

-

## Throw Ratio

-

## Audio

1 x 2W

## Connections

DVI  
D-sub 15pin in und out  
Cinch Video in  
Cinch Stereo in  
S-Video in  
Mini Jack  
USB  
RS232C

## Ceiling Mounting

Yes

## Power

-

## Size WxHxD

328 x 88 x 238 mm (12,9"x3,5"x9,4") 6,87 L/dm<sup>3</sup>

## Operating Noise

-

## Weight

2,90 kg / 6,39 lbs.

## Keystone


Vert.: +/-15°

## Illumination

80%

## Frequenz

H-sync: 13-90 kHz

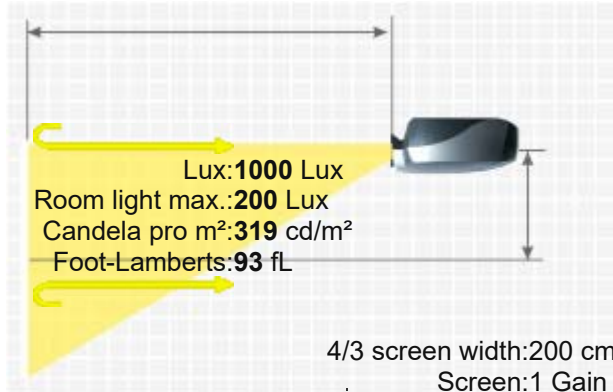

Foot-Lamberts

93 fL / max. 477 cm screen width

319 cd/m<sup>2</sup>

Features

■ Eco Mode

■ Kensington Slot

Status

2005 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



# HCinema

<https://www.projector-database.com/pro/vivitek628mx-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.