

Vivitek DK7288Z

VIVITEK DK7288Z



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

The DK7288Z 3D Laser DLP has 10,000 ANSI lumens, a native contrast ratio of 1300:1 and a UHD (4K2K) resolution of 3840 x 2160. Thanks to the laser, the service life is 20,000 hours, which would equate to over 13.7 years at 4 hours? use per day. The integrated lens shift offers flexibility when positioning the projector. 10,000 ANSI lumens ensure that an image width of up to 871 cm is possible. In rooms with ambient light, the projector is best used with a narrower image width; we would recommend a maximum of 581 cm. Furthermore, it is compatible with Full HD 1080p, 4K and 3D, meaning the projector can recognise all currently available Blu-ray formats.



1 x 0,67" DLP Chip

UHD 4/3 Ti Digital Light Processing Chip

Projector

10000

1300:1 native

-

Vert.: +50% -45% Hori.: +/-12%

UHD (4K2K) 3840 x 2160

8.294.400 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

R+B Dual Laser

20000 h.

0,00 € Laser

Manual

Manual

optional

optional

2 x 10W

2x HDMI 2.0 (1x Out)

Audio-In (Mini-Jack)

RJ45 (LAN)

RS-232-in

3D Sync-in (VESA)

3D Sync-in out (VESA)


USB Type A Power (5V /1.5A)

Screen

3333 Lux (200 cm Screen width)

-

-

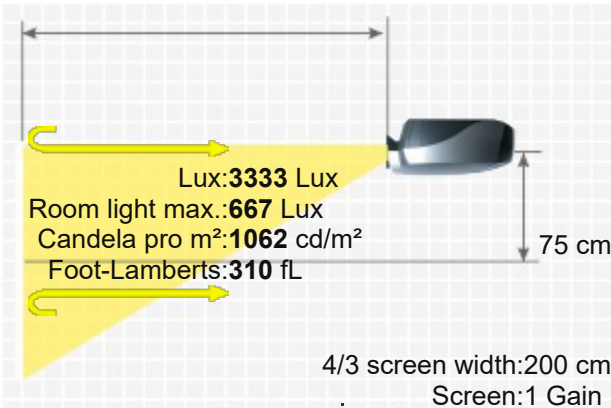


USB (Service)
Audio-Out (3.5mm Jack)
12v Trigger (3.5mm Jack)
Remote Jack (wire remote) in
Remote Jack (wire remote) out
SDM-S (option HD-BaseT & WiFi display)
Ceiling Mounting Yes, is possible.
Power 643W Normal / 497W Eco
Size WxHxD 517 x 202 x 470 mm (20,4"x8"x18,5") 49,08 L/dm³
Operating Noise -

Weight 22,00 kg / 48,5 lbs.
Keystone Vert.: +/-30°
Hori.: +/-30°
Illumination 90%
Frequenz H-sync: 15,31-91,4 kHz
V-sync: 24-120 Hz
Foot-Lamberts 310 fL / max. 871 cm screen width
1062 cd/m²
Features

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- User logo
- Eco Mode
- Kensington Slot
- 24/7 continuous operation capable
- Lan network compatible.

Screen Mirroring -

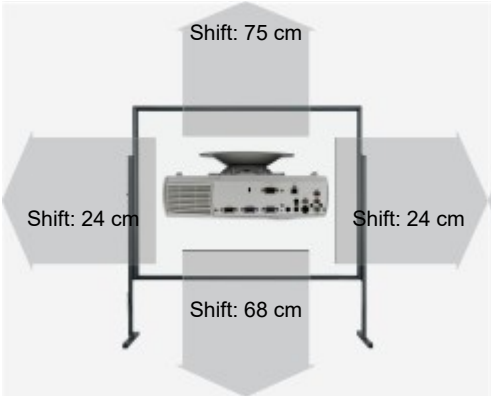

Optional accessories

 Deckenhalterung schwarz Halterung45 83,60 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
D88-LOZ201	5.31-8.26:1	1062-1652 m	50-45%	+/-12%	Powered
D88-LOZ101	3.58-5.38:1	716-1076 m	50-45%	+/-12%	Powered
D88-SMLZ01	2.22-3.67:1	444-734 m	50-45%	+/-12%	Powered
D86-1929	1.93-2.9:1	386-580 m	50-45%	+/-12%	Powered
D86-1519	1.54-1.93:1	308-386 m	50-45%	+/-12%	Powered
D86-1216	1.25-1.6:1	250-320 m	50-45%	+/-12%	Powered
D86-1113	1.1-1.3:1	220-260 m	50-45%	+/-12%	Powered
D86-0711	0.77-1.1:1	154-220 m	50-45%	+/-12%	Powered
D86-04705	0.47-0.5:1	94-100 m	50-45%	+/-12%	Powered
D88-WF01	0.76:1	152 m	50-45%	+/-12%	No Zoom

Status 2026 Current model // Last update of the data: 2026-08-11
Created: 2026-07-30 09:46:45

Data 

More Details



HCinema

<https://www.projector-database.com/pro/vivitekdk7288z-en.html>