

Wolf Cinema PRO-415

WOLF CINEMA PRO-415



The stationary PRO-415 3D DLP has 5000 Ansi lumens, a contrast of 5000:1 and an HDTV 1920 x 1080 resolution. The integrated lens shift gives freedom when positioning the projector. Thanks to the brightness of 5000 Ansi lumens, a picture width of 718 cm is possible. The projector can also handle slightly brighter rooms with a smaller image width (we recommend max. 479 cm). It is also Full HD 1080P and 3D compatible. This model is no longer offered by Wolf Cinema.

Brief Introduction

Beta 2.5

Display Type



1 x 0,65 DC3 DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 5000

Screen 2222 Lux (bei 200 cm Screen)

Contrast

5000:1 full on/off

Screen 5000:1 full on/off

Black Level

1,0000 min. Lumen

Screen 0,445 min. Lumen

Lens shift

Vert.: +70% -20% Hori.: +/-10%

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

Video Modes

UXGA 1600 x 1200 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

370W Lamp

Articel Nr.: WC-LPU370

Light Life

1500 h.

Operating Costs

7,62% / 0,25 €

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

3W

Connections

HDMI 1.4a in

DVI in


D-sub 15pin in und out

5 x BNC RGBHV in

YUV in

Cinch Video in

Cinch Stereo in

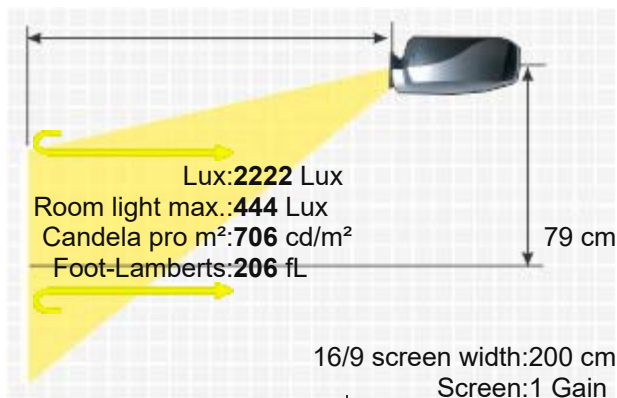

S-Video in
Mini Jack Audio in und out
USB in
RS232C Din 9 pin in
RJ45 in
Ceiling Mounting Yes
Power 310 / 260W in Eco Mode
Size WxHxD 430 x 181 x 340 mm (16,9"x7,1"x13,4") 26,46 L/dm³
Operating Noise 37 dB in Eco Mode


Weight 8,44 kg / 18,61 lbs.
Keystone Vert.: +/-15°
Illumination -

Frequenz -

Foot-Lamberts 206 fL / max. 718 cm screen width
706 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Lan network compatible.

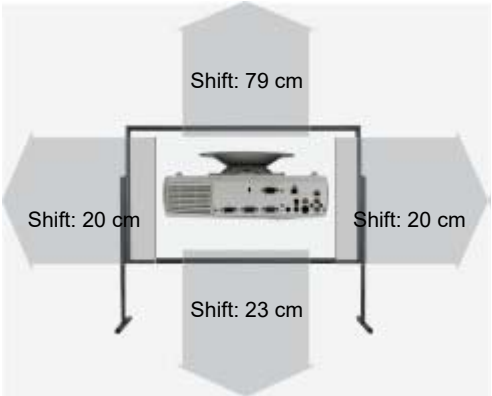

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
WC-LS-415-UST	1.1-1.3:1	2.2-2.6 m	70-20%	+/-10%	Powered
WC-LS-415-ST	1.54-1.93:1	3.1-3.9 m	70-20%	+/-10%	Powered
WC-LS-415-LT	1.93-2.89:1	3.9-5.8 m	70-20%	+/-10%	Powered
WC-LS-415-EL	3-5:1	6-10 m	70-20%	+/-10%	Powered
Fix Optional Lenses					
WC-LS-415-STF	0.77:1	1.5 m	0.00% Fix		No Zoom

Status 2015 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2015-09-16 14:38:32

Data



More Details



HCinema

<https://www.projector-database.com/pro/wolfcinemapro415-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.