1400 LUMENS

XGA RESOLUTION

ONLY 3.8 POUNDS


XD-16n

INCREASE THE EFFECTIVENESS OF YOUR PRESENTATIONS with the BOXLIGHT XD-16n. Built to showcase your presentations with superbodied color reproduction and excellent video images, The XD-16N INCORPORATES THE LATEST DLPTM TECHNOLOGY, XGA RESOLUTION, A UNIQUE COLOR DRUM and premium features in a 3.8-pound microportable projector. DIGITAL KEYSTONE CORRECTION, DIGITAL ZOOM IMAGING AND AUTO SIGNAL SYNCHRONIZATION are included to sharpen your professional image. And you can be assured that YOUR MESSAGE WILL COME ACROSS CRYSTAL CLEAR WITH FAROUDJA DCDITM TECHNOLOGY, 1200:1 CONTRAST RATIO AND 1400 ANSI LUMENS. A laser pointer remote mouse is included for your convenience. The BOXLIGHT XD-16n – taking your presentations to the next level Call the projector specialists at BOXLIGHT today!

19332 Powder Hill Place Poulsbo, Washington 98370 800.762.5757 360.779.7901 www.boxlight.com



XD-16n projector

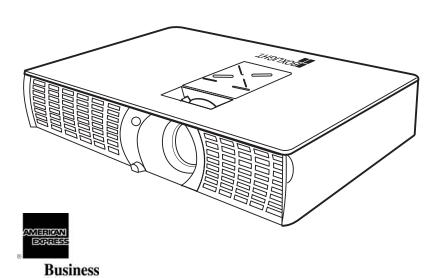

4.9 - 26.2ft. / 1.5 - 8m

Finance

Throw Distance:

- Lightweight 3.8 lbs. (1.7kg) DLP[™] technology.
- 1400 ANSI lumens.
- True XGA resolution with compression to SXGA / HDTV compatibility.
- 1200:1 contrast ratio.
- Durable magnesium alloy body.
- Digital keystone adjustment.
- Digital zoom imaging.
- Unique color drum technology for thinner unit, higher contrast ratio and lower noise output.
- Faroudja DCDi[™] technology for superior video images.
- · Laser remote mouse control.
- All BOXLIGHT projectors feature the latest in technology and design.
- Lifetime 24/7 technical support.
- The fastest response time in the industry from our state-of-the-art service center.



To contact BOXLIGHT:

Direct	800.762.5757
Rental	800.736.6954
Education	800.689.6676
Government	800.497.4009
International	360.779.7901
Toll Free Fax	888.353.4242
Internet	www.boxlight.cor

©2003, BOXLIGHT Corporation. *Specifications are subject to change without notice.

Resolution:	1024 x 768 true XGA & compressed 1280 x 1024 SXGA	Keystone:	Digital adjustment of +/- 15 degrees
Brightness:	1400 ANSI Lumens	Adjustments:	On-board and a remote
Lamp:	150 Watt NSH	Power Supply:	100 - 240V at 50/60Hz
Display Type:	0.7" DDR DMD™ single chip	Power Consumption:	250 Watts
Contrast Ratio:	1200:1	Compatibility:	SXGA, XGA, SVGA, VGA, Mac
Colors:	16.7 million	Dimensions:	9.8" x 2.3" x 6.7" / 24.9cm x 5.9cm x 17.1cm (H x W x D)
Aspect Ratio:	4:3, 16:9 compatible	Weight:	3.8lb / 1.7kg
Inputs:	1) 15-pin computer; 1) S-video; 1) Composite (RCA) video	FCC Certification:	Class B
Outputs:	1) USB mouse port	Warranty:	Two-year parts and labor (120-day or 500-hour lamp guarantee)
Audible Noise:	36dB		
Video:	NTSC, NTSC4.43, PAL, PAL-M, PAL-N, SECAM	Accessories Included:	Laser remote control mouse, VGA cable, 15-pin to RCA component video adapter, S-video cable, composite video cable, USB mouse control cable, power cord, soft carry case
HDTV/EDTV:	Compatibility: 1080i, 720p, 480p		
Horizontal Scan Frequency:	31.5 - 80kHz		
Vertical Refresh Rate:	43 - 100Hz	Optional Accessories:	Portable PAS speaker system, Mac adapter, ceiling mount plate, suspension pole, various carrying cases, Projector Director networking software
Projection Lens:	Manual zoom and focus, F/2.4, 1:1.3 zoom ratio		
Diagonal Image Size:	26" - 228" / 66 - 580cm		