Kodak DP 850

Brief Introduction
Beta 2.5

The standard portable DP 850 DLP projector from Kodak has 450 Ansi lumens, a contrast of 500:1 230:1 according to Ansi and an SVGA 800 x 600 resolution. 450 Ansi lumens ensure that a picture width of 185 cm is also possible. However, if room light is available, the picture should be max. 123 cm wide. This model is no longer offered by Kodak.

Display Type
1 x 0,9 Chip DLP
SVGA 4/3 Ti Digital Light Processing Chip

	Projector	Screen
Ansi-Lumen	450	146 Lux (bei 203 cm Screen)
Contrast	500:1 full on/off 230:1 nach Ansi	500:1 full on/off 230:1 nach Ansi
Black Level	0,9000 min. Lumen	0.294 min. Lumen

Offset -

Resolution
SVGA 800 x 600
480.000 Pixel
XGA 1024 x 768 compressed

Video Modes NTSC, PAL, NTSC 4,43

Application Standard-Portabel | External training and company presentations, as well as product presentations.
Very narrow picture width and rooms with very little light.

Light Source 120W UHP Lamp
Articel Nr.: 890-0995

Light Life 2000 h.

Operating Costs -

Focus Powered

Zoom Powered 1,5

Objective -

Throw Ratio -

Audio 10W Mono

Connections
Full digital connectivity
Computer (EVC plug)
S-video (MiniDIN/4pin)
Composite video (RCA)
Stereo Audio L/R (RCA)
RS232 connectivity

Ceiling Mounting -

Power 180W

Size WxHxD 225 x 130 x 335 mm (8,9"x5,1"x13,2") 9,8 L/dm³

Operating Noise -

Lux:**146** Lux
Room light max.:**29** Lux
Candela pro m²:**48** cd/m²
Foot-Lamberts:**14** fL

4/3 screen width:203 cm
Screen:1 Gain

Weight 4,50 kg / 9,92 lbs.

Keystone -

Illumination 85%

Frequenz H-sync: 15,0-60,0 kHz
V-sync: 48-85 Hz

Foot-Lamberts 14 fL / max. 185 cm screen width
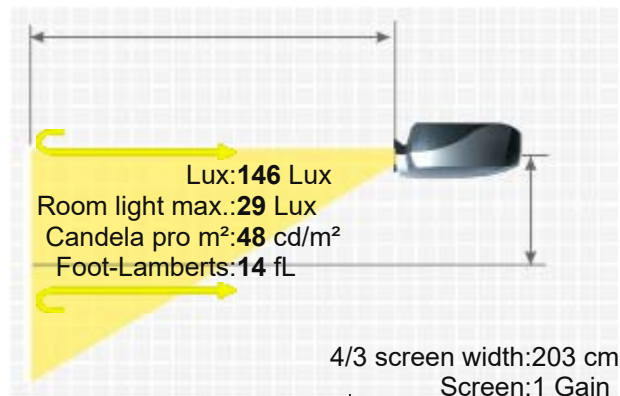
48 cd/m²

Features	■ Remote control with mouse control ■ Built-in TV Tuner ■ Zoom Factor: 1.5x	
In Test	-	
Optional	Lamp ruby	Ruby-LMP2071
	Bulb only original	890-0995
	Order here: https://www.hcinema.de/lampen/shop-en.php?id=d2071	
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04	
Data		

More Details

HCinema

https://www.projector-database.com/pro/kodakdp850-en.html