


Digital Projection Lightning 38 1080p 3D



Brief Introduction

Beta 2.5

The Digital Projection model Lightning 38 1080p 3D is a DLP projector with HDTV 1920 x 1080 resolution and a contrast of 2000:1. Including a lens shift function, which provides freedom during installation. The projector can illuminate a screen width of up to 1760 cm thanks to its 30000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 1173 cm is recommended. The model is also Full HD 1080P compatible. It was launched in 2009 and is no longer offered by the manufacturer Digital Projection, but is still very popular in our projector database.

Display Type



3 x 0,95" DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

30000

13333 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

15,0000 min. Lumen

6,674 min. Lumen

Lens shift

Vert.: +/-50% Hori.: +25% -17%

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

3D Compatibility

Side-by-Side | Frame Sequential (3D Ready)

Application

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

Xenon Lamp

Article Nr.: 103-238 / 103-238R

Light Life

500 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

Nein

Connections

DVI in
D-sub 15 pin in
5 x BNC RGBHV in
S-Video in
BNC Video in
RJ45

Ceiling Mounting

RS232C Din 9 pin
Yes, is possible.

Power


4000W

Size WxHxD

728 x 495 x 1028 mm (28,7"x19,5"x40,5") 370,45 L/dm³

Operating Noise

59dB

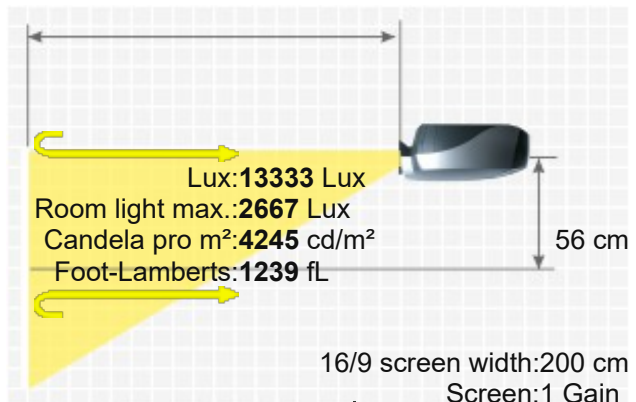

Weight

113,00 kg / 249,12 lbs.

Keystone

-

Illumination

87%

Frequenz H-sync: 15-100 kHz
 V-sync: 24-85 Hz
 Foot-Lamberts 1239 fL / max. 1760 cm screen width
 4245 cd/m²
 Features

- Full HD 1080P compatible
- Lens shift Funktion
- Gamma correction
- Wi-Fi network compatible.
- Lan network compatible.

 Screen Mirroring -



Optional accessories		
Lampe Original	103-238 / LMP00519	EOL €
Luftfilter Original	105-222	EOL €

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
105-613 / 107-198	5.04-6.46:1	10.1-12.9 m	70-50%	+/-18.75%	Powered
105-612 / 107-198	2.56-4.16:1	5.1-8.3 m	70-50%	+/-18.75%	Powered
105-611 / 107-197	1.87-2.56:1	3.7-5.1 m	70-50%	+/-18.75%	Powered
105-610 / 107-196	1.39-1.87:1	2.8-3.7 m	70-50%	+/-18.75%	Powered
Fix Optional Lenses					
105-609 / 105-609 (short)	1.12:1	2.2 m	70-50%	+/-18.75%	No Zoom
105-608 / 105-608	1.12:1	2.2 m	70-50%	+/-18.75%	No Zoom
105-607 / 107-195	0.67:1	1.3 m	+/-10%	+/-10%	No Zoom

Status 2009 Discontinued (EOL) // Last update of the data: 2025-03-03
 Data

More Details



HCinema
<https://www.projector-database.com/pro/DigitalProjectionlightning381080p3d-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
 HCinema is not responsible for any errors or omissions contained in product descriptions.