

Boxlight SP 45m

BOXLIGHT SP 45M



Brief Introduction

Beta 2.5

The Boxlight SP 45m LCD projector has 1000 Ansi lumens, a contrast of 400:1 and an SVGA 800 x 600 resolution. Thanks to the brightness of 1000 Ansi lumens, a picture width of 275 cm is possible. In room light, the picture should be max. 183 cm wide. It is no longer offered by the manufacturer Boxlight.

 3 x 0,55" LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen

1000

324 Lux (bei 203 cm Screen)

Contrast

400:1 full on/off

400:1 full on/off

Black Level

2,5000 min. Lumen

0.816 min. Lumen

Offset

Resolution

SVGA 800 x 600

480.000 Pixel

Video Modes

NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM 480p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

132W UHP Lamp

Articel Nr.: SP-45m

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,19

Objective

-

Throw Ratio

1,8-2,15:1

Audio

1 x 1W Mono

Connections

Inputs: 1- 15-pin computer, 1- composite video, 1- S-video, 1 - mini-jack audio Video

Outputs: 1- 15-pin computer, 1-control port for Maus operation, 1-USB port for Maus operation

Ceiling Mounting

Yes

Power

210W

Size WxHxD

255 x 95 x 305 mm (10"x3,7"x12") 7,39 L/dm³

Operating Noise

35dB

Weight


2,63 kg / 5,8 lbs.

Keystone

Vert.: +/-15°

Illumination

-

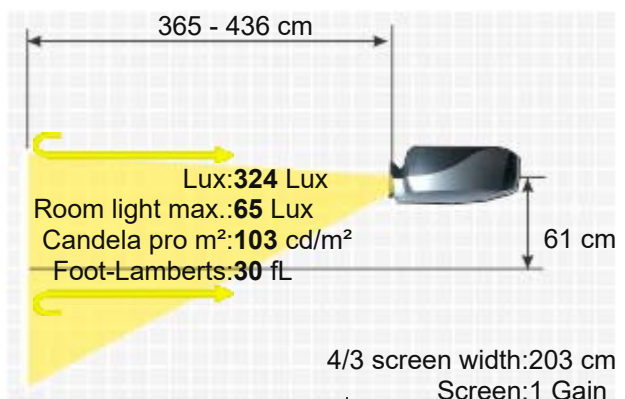

Frequenz
H-sync: 15-100 kHz
V-sync: 43,5-130 Hz

Foot-Lamberts
30 fL / max. 275 cm screen width

103 cd/m²

Features
■ Picture-in-Picture
■ Remote control with mouse control
■

In Test
-



Bulb only Philips
NLMP731

Optional
Lamp ruby
Ruby-LMP731

Lamp original
LMP731

Status
Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n731>
- Discontinued (EOL) // Last update of the data: 2023-08-04



More Details

<https://www.projector-database.com/pro/boxlightsp45m-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.