


Christie HD5Kc

CHRISTIE HD5Kc

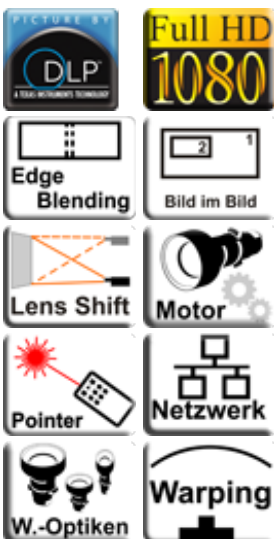

A brief introduction to the HD5Kc: The Christie DLP projector offers 5000 Ansi-Lumen, a contrast of 1600 - 2000:1 and a HDTV 1920 x 1080 resolution. Including a lens shift function, which provides freedom during installation. An image width of up to 718 cm is possible as the projector has 5000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 479 cm. If the image is still too small, the integrated edge blending software can help to project a larger image with additional projectors. This model is no longer offered by Christie. Unfortunately, we can no longer offer a replacement lamp for this model, neither original nor replica.

Brief Introduction

Beta 2.5



3 x 0,95" DC3 DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

5000 / alt 4000
1600 - 2000:1 full on/off
3,1250 min. Lumen
Vert.: +/-59,5% Hori.: +/-21%
HDTV 1920 x 1080
2.073.600 Pixel
QXGA 2048 x 1536 compressed
PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Stationary | Permanent installation in the training room and meeting room as well as the conference room.
Wide screen width or rooms with plenty of light (over 200 lumens).
1000W Xenon Lamp
Article Nr.: 003-120117-01 /
03-000833-01P
1500 h.

2222 Lux (bei 200 cm Screen)
1600 - 2000:1 full on/off
1,391 min. Lumen

Vert.: +/-59,5% Hori.: +/-21%

HDTV 1920 x 1080

2.073.600 Pixel

QXGA 2048 x 1536 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

1000W Xenon Lamp

Article Nr.: 003-120117-01 /

03-000833-01P

1500 h.

-

Powered


Powered

optional

optional

Nein

DVI-I mit HDCP in
5 x BNC RGBHV in
S-Video in
Cinch Video in
RS232C

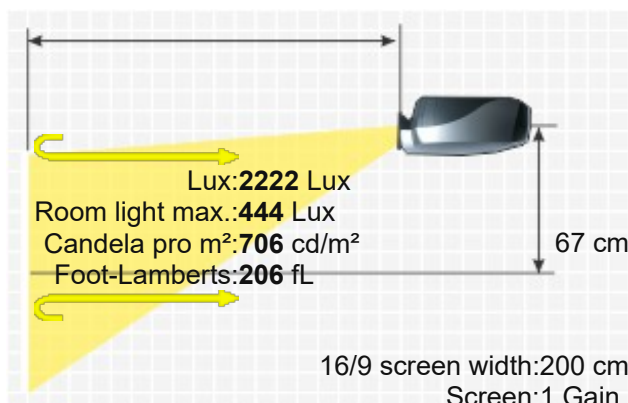

RS422
RJ45
Weitere Anschlüsse optional.



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
1500W
660 x 313 x 566 mm (26"x12,3"x22,3") 116,92 L/dm³
-

Weight
Keystone
Illumination

34,00 kg / 74,96 lbs.
-
90%

Frequenz

H-sync: 15-120 kHz
V-sync: 23,97-150 Hz


Foot-Lamberts

206 fL / max. 718 cm screen width
706 cd/m²

- Features
- Lens shift Funktion
 - Freeze
 - Gamma correction
 - Warping
 - Edge Blending
 - Picture-in-Picture
 - Password protection
 - Remote control with laser pointer
 - Control via web browser
 - Lan network compatible.
 - Optional image warping

Screen Mirroring

-

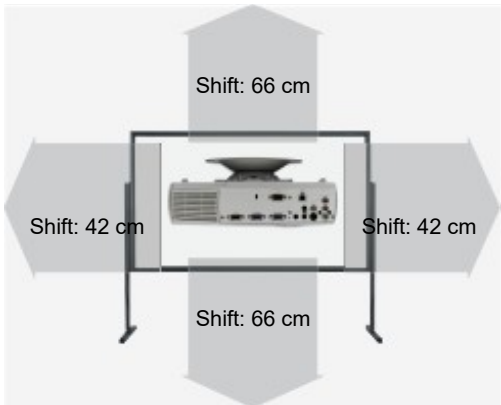

Optional accessories

Lampe Original	003-120117-01 / 03-000833-01P	EOL €
10 x Luftfilter Original	104-133101-01	224,85 €
Rauch Luftfilter Original	104-127101-01	312,83 €
10 x Grobstaubfilter Original	104-131101-01	511,40 €
Luftfilter Original	104-125101-01	130,01 €
 Deckenhalterung	HeavyDuty	378,28 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
4.1-6.9:1	4.22-7.02:1	8.4-14 m	+/-59.5%	+/-21%	Powered
1.8-2.6:1	1.85-2.55:1	3.7-5.1 m	+/-59.5%	+/-21%	Powered
1.4-1.8:1	1.41-1.9:1	2.8-3.8 m	+/-59.5%	+/-21%	Powered
2.6-4.1:1	2.6-4.23:1	5.2-8.5 m	+/-59.5%	+/-21%	Powered
Fix Optional Lenses					
1.2:1	1.15:1	2.3 m	+/-59.5%	+/-21%	No Zoom
0.73:1	0.73:1	1.5 m	+/-23.5%	+/-9.5%	No Zoom

Status 2006 Discontinued (EOL) // Last update of the data: 2025-03-03

Data



More Details



HCinema

<https://www.projector-database.com/pro/christiehd5kc-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.