

Christie LW555

CHRISTIE LW555



The Christie LW555 LCD projector has 5500 Ansi lumens, a contrast of 800:1 and a WXGA 1280 x 800 resolution. Includes a lens shift and keystone correction function, which provides freedom during installation. An image width of up to 753 cm is possible as the projector has 5500 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 502 cm. Even 1080P video signals are no problem for the projector. This model is no longer offered by Christie.



3 x 0,75" LCD TFT Panel mit MLA
WXGA 16/10 Liquid Crystal Display with Micro Lense Array

Projector

5500 / 4400 im Eco Mode

2200 Lux (bei 200 cm Screen)

Contrast 800:1 full on/off

800:1 full on/off

Black Level 6,8750 min. Lumen

2,759 min. Lumen

Lens shift Vert.: +/-70% Hori.: +/-10%

Resolution WXGA 1280 x 800

1.024.000 Pixel

Video Modes WUXGA 1920 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source 330W NSH Lamp

Light Life Articiel Nr.: 003-120507-01

Operating Costs 2000 h. 3000 h. in eco Mode

-

-

Focus Powered


Zoom Powered 1,69

Objective F=1,7-2,3 f=26,9-45,4 mm / L optional

Throw Ratio 1,67-2,81:1

Audio 7W Mono

Connections HDMI 1.3 in
5 x BNC RGBHC in
D-sub 15 pin in und out
YUV in
S-Video in
Cinch Video in
Mini Jack Audio in und out
USB Typ B
RJ45 in

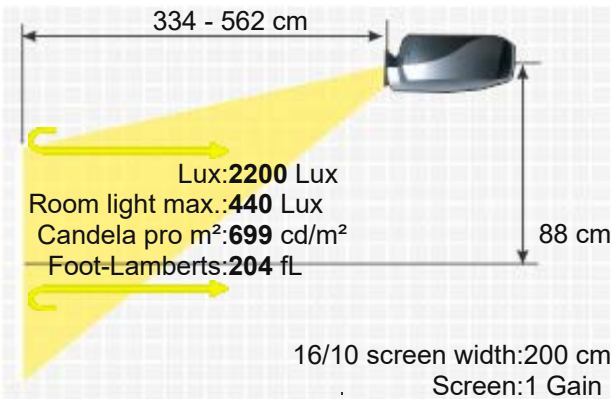



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
460 / 385W in Eco Mode
489,5 x 164 x 434,8 mm (19,3"x6,5"x17,1") 34,81 L/dm³
38 / 31 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

8,90 kg / 19,62 lbs.
Vert.: +/-40°
Hori.: +/-20°
90%
H-sync: 15-100 kHz
V-sync: 48-100 Hz
Range max.: 140 MHz
204 fL / max. 753 cm screen width
699 cd/m²



Features

- Full HD 1080P compatible
- Direkt Power Off
- Lens shift Funktion
- Freeze
- Blackboard Modus
- User logo
- Eco Mode
- Kensington Slot
- Gamma correction
- Dynamic iris
- Picture-in-Picture
- Password protection
- Control via web browser
- Lan network compatible.
- Digital Zoom and Picture-in-picture

Bulb only NLMP19476
Lamp ruby Ruby-LMP19476
Lamp original 003-120507-01
Compatible lamp LMP-K19476

Optional

Air filter compatible Alternative zu:003-003084-01 / POA-FIL-080 / 610-346-9034 / ET-SFYL080
Remote control original 645 103 0191 / MXAP
Air filter original 003-003084-01 / POA-FIL-080 / 610-346-9034 / ET-SFYL080
Ceiling Mount 100-120 Halterung100

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n20261>

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Lens 4.60-7.36:1 Ultra Long	4.6-7.36:1	9.2-14.7 m	+/-70%	+/-10%	Powered
Lens 2.89-4.60 Long	2.89-4.6:1	5.8-9.2 m	+/-70%	+/-10%	Powered
Lens 1.70-2.89:1 Standard	1.7-2.89:1	3.4-5.8 m	+/-70%	+/-10%	Powered
Lens 1.25-1.70:1 Short	1.25-1.7:1	2.5-3.4 m	+/-70%	+/-10%	Powered
Fix Optional Lenses					
0.98:1 Fixed	0.98:1	2 m	0.0% Fix		No Zoom
0.8:1 Fixed	0.8:1	1.6 m	0.0% Fix		No Zoom

Status
Data

2010 Discontinued (EOL) // Last update of the data: 2023-08-04





HCinema

<https://www.projector-database.com/pro/christielw555-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.