

Christie Matrix 1500

CHRISTIE MATRIX 1500



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

The Matrix 1500 DLP projector from Christie has 1500 Ansi lumens, a contrast of 1000:1 and an SXGA 1280 x 1024 pixel resolution. As the projector has horizontal and vertical keystone correction, the projector can be set up with plenty of free space in the room. The projector can illuminate a picture width of up to 328 cm with its 1500 Ansi lumens. In room lighting, however, the picture width should ideally be less than 219 cm. The operating noise of just 28 decibels makes the projection quiet. The model built in 2004 is no longer offered by Christie.



1 x DM3 Dark Metal DLP Chip
SXGA 5/4 Ti Digital Light Processing Chip

Projector
Screen

1500 -

1000:1 full on/off

1,5000 min. Lumen

455 Lux (bei 203 cm Screen)

1000:1 full on/off

0.457 min. Lumen

SXGA 1280 x 1024 Pixel

1.310.720 Pixel

UXGA 1600 x 1200 compressed

Pal, Secam, NTSC, HDTV

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

250W UHP Lamp

Articel Nr.: 03-000710-01P

2000 h.

-

Powered


Powered

optional

optional

-

- HD15 (x2)
- DVI-D (x1)
- S-video Y/C (4-pin mini-DIN)
- Composite video (1 x RCA)
- Component video (3 x RCA)
- Audio (4 inputs for data and video sources, 3.5mm stereo mini-jacks)
- Analog RGB HD15 out(x1)
- Audio out (3.5mm stereo mini-jack)out

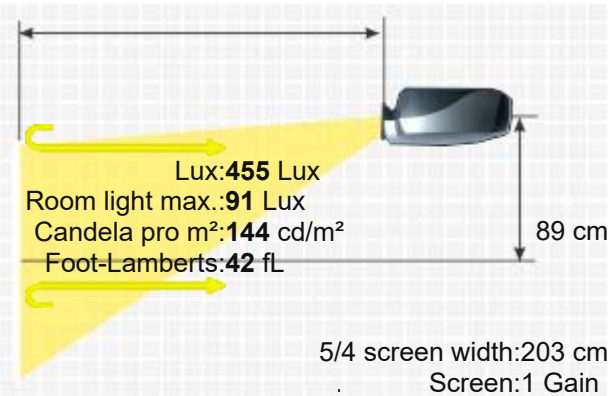

Ceiling Mounting Yes
Power 350W 400W maxinal
Size WxHxD 244 x 88 x 278 mm (9,6"x3,5"x10,9") 5,97 L/dm³
Operating Noise 28dB

Weight 3,00 kg / 6,61 lbs.
Keystone Vertical und horizontal
Illumination -
H-sync: 15-120 kHz
Frequenz V-sync: 50 -110 Hz
Range max.: 205 MHz
Foot-Lamberts 42 fL / max. 328 cm screen width
144 cd/m²

- Features
- Freeze
 - Eco Mode
 - Kensington Slot
 - Gamma correction
 - Remote control with laser pointer und mouse control
 - Faroudja DCDi ,
 - RJ45 via RS232C module optional
 - 10-bit digital Gamma correction

Optional

Osram bulb only	NLMP864
Lamp ruby	Ruby-LMP864
Lamp original	03-000710-01P
Compatible lamp	LMP-K19070

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n864>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Christie 1.75-2.25:1	1.75-2.25:1	3.6-4.6 m	55% Fix		Manual
Status	2004 Discontinued (EOL) // Last update of the data: 2023-08-04				



More Details



HCinema

<https://www.projector-database.com/pro/christiematrix1500-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.