

Christie Matrix 3000

CHRISTIE MATRIX 3000



With the Matrix 3000, manufacturer Christie offers a stationary DLP projector with SXGA+ 1400 x 1050 resolution and a contrast of 1500 - 4000:1. The integrated lens shift gives freedom when positioning the projector. An image width of up to 477 cm is possible as the projector has 3000 Ansi lumens. However, if room light is available, the image should be max. 318 cm wide. If the image width is not sufficient, the projector offers integrated edge blending software, with which several projectors can project a large image together. This model is no longer offered by Christie.



1 x 0,95" DC2 DDR DLP Chip
SXGA 4/3 Ti Digital Light Processing Chip

Projector	3000 / 1500 im single lamp Mode	Screen	1000 Lux (bei 200 cm Screen)
Contrast	1500 - 4000:1 full on/off		1500 - 4000:1 full on/off
Black Level	2,0000 min. Lumen		0,668 min. Lumen

Vert.: +/-60% Hori.: +/-39% motorisch
SXGA+ 1400 x 1050

1.470.000 Pixel
QXGA 2048 x 1536 compressed

HDTV 720p, 1080i,

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

2 x 300W P-VIP Lamp

Article Nr.: 03-900520-01P

2000 h.

-

Powered


Powered

optional

optional

nein

DVI-I mit HDCP
5 x BNC RGBHV
Cinch Video in
S-Video in
RJ45 in
RS232C in und out
RS244C in

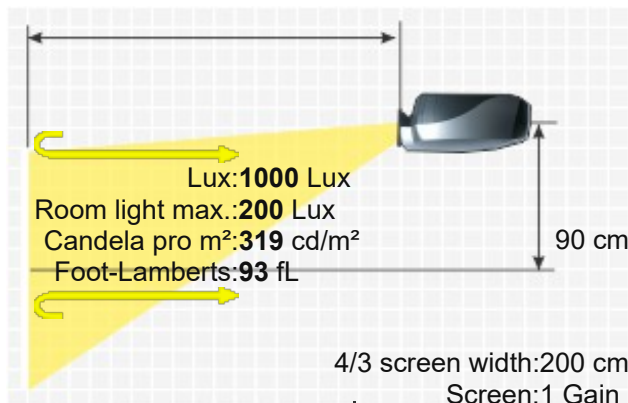

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

weitere Anschlüsse Optional



Ceiling Mounting	Yes, is possible.
Power	740W
Size WxHxD	374,4 x 256,5 x 510,4 mm (14,7"x10,1"x20,1") 48,83 L/dm ³
Operating Noise	-

Weight	16,00 kg / 35,27 lbs.
--------	-----------------------


Keystone	-
Illumination	-

Frequenz	H-sync: 15-120 kHz V-sync: 23,97-120 Hz
----------	--

Foot-Lamberts	93 fL / max. 477 cm screen width 319 cd/m ²
---------------	---

Features	■ Lens shift Funktion motorisch ■ Freeze ■ Kensington Slot ■ Gamma correction ■ Dynamic iris ■ Edge Blending ■ Picture-in-Picture ■ Password protection ■ Remote control with laser pointer ■ Control via web browser ■ Lan network compatible.
----------	---

Screen Mirroring	-
------------------	---

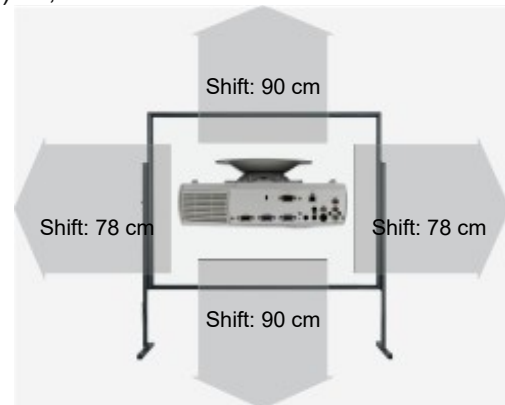

Optional accessories

	Einzel Nackte Osram Lampe	NLMP15426	103,58 €
	Einzel Lampe Ruby	Ruby-LMP15426	130,10 €
	Einzel Lampe Original	03-900520-01P	EOL €
	Einzel Kompatible Lampe	LMP-K15426	70,96 €
	Deckenhalterung 220	Halterung45	83,60 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Christie 4.0-7.0:1	3.98-6.83:1	8-13.7 m	+/-60%	+/-39%	Powered
Christie 2.5-4.0:1	2.49-3.99:1	5-8 m	+/-60%	+/-39%	Powered
Christie 1.7-2.5:1	1.71-2.49:1	3.4-5 m	+/-60%	+/-39%	Powered
Christie 1.3-1.7:1	1.33-1.75:1	2.7-3.5 m	+/-60%	+/-39%	Powered
Fix Optional Lenses					
Christie 1.2:1	1.26:1	2.5 m	+/-60%	+/-39%	No Zoom
Christie 0.8:1	0.85:1	1.7 m	+/-6%	+/-3.5%	No Zoom

Status 2004 Discontinued (EOL) // Last update of the data: 2025-03-03

Data



More Details



HCinema

<https://www.projector-database.com/pro/christiematrix3000-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.