

Christie MIRAGE WU12

CHRISTIE MIRAGE WU12



A brief introduction to the Christie MIRAGE WU12. The DLP projector has a WUXGA 1920 x 1200 resolution and a contrast of 1500-2000:1. With a brightness of 12000 Ansi lumens, a picture width of 1113 cm is possible. The projector can also handle slightly brighter rooms with a smaller picture width (we recommend max. 742 cm). If the image width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together. Even 1080P playback is no problem for the projector. The model built in 2009 is no longer offered by Christie. It should also be noted that there are unfortunately no longer any replacement lamps available for the projector, neither originals nor replicas.



3 x 0,95" DC3 DLP Chip

WUXGA 16/9 Ti Digital Light Processing Chip

Projector	12000	Screen	5333 Lux (200 cm Screen width)
	1500-2000:1 full on/off		1500-2000:1 full on/off
	8,0000 min. Lumen		3,561 min. Lumen

WUXGA 1920 x 1200

2.304.000 Pixel

QXGA 2048 x 1536 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Frame Sequential (3D Ready)

Event | Very large screen width and rooms with plenty of light and shaded daylight.

2000W Xenon Lamp

Article Nr.: 03-900519-01P /

03-900519-01P / 003-120135-01

1000 h.

-

Powered


Powered

optional

optional

Nein

DVI-I in
5 x BNC RGBHV in
S-Video in
Cinch Video in
3 x RS232C in
RS422 in
RJ45

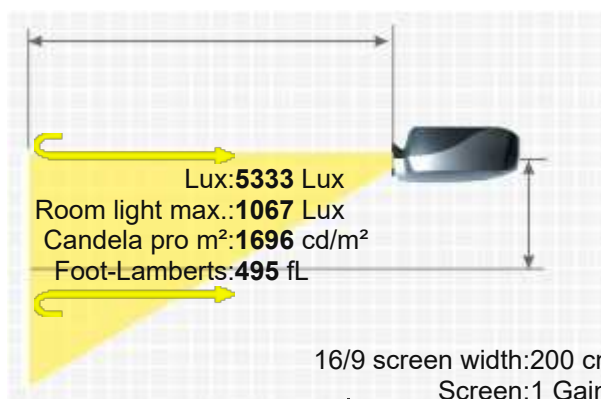



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
3000W
631,4 x 384 x 814,8 mm (24,9"x15,1"x32,1") 197,24 L/dm³
-

Weight
Keystone
Illumination

64,00 kg / 141,1 lbs.
-
-

Frequenz

-

Foot-Lamberts

495 fL / max. 1113 cm screen width
1696 cd/m²

- Full HD 1080P compatible
- Freeze
- Gamma correction
- Dynamic iris
- Warping
- Edge Blending
- Picture-in-Picture
- Password protection
- Remote control with laser pointer
- Control via web browser
- Lan network compatible.

Features

Screen Mirroring

-



Optional accessories

 Lampe Original 03-900519-01P / 003-120135-01 EOL €

 Deckenhalterung HeavyDuty 470,94 €

Optional Lenses



Name	Ratio	Distance	Shift V	Shift H	Zoom
4.1-6.9:1 (104-115101-01)	4.23-7.04:1	846-1408 m	+/-59.5%	+/-21%	Powered
2.6-4.1:1 (104-114101-01)	2.62-4.24:1	524-848 m	+/-59.5%	+/-21%	Powered
1.8-2.6:1 (104-113101-01)	1.86-2.57:1	372-514 m	+/-59.5%	+/-21%	Powered
1.4-1.8:1 (104-112101-01)	1.42-1.92:1	284-384 m	+/-59.5%	+/-21%	Powered
1.2:1 (104-116101-01)	1.25:1	250 m	+/-59.5%	+/-21%	No Zoom
0.71:1 (104-110101-01)	0.75:1	150 m	+/-23.5%	+/-9.5%	No Zoom
1.2:1 (104-111101-01)	1.21:1	242 m	+/-59.5%	+/-21%	No Zoom

Status 2009 Discontinued (EOL) // Last update of the data: 2026-05-05

Data



More Details



HCinema

<https://www.projector-database.com/pro/christiemiragewu12-en.html>