

Dukane ImagePro 8102



DUKANE IMAGEPRO 8102



Brief Introduction

Beta 2.5

The Dukane ImagePro 8102 LCD projector has 2500 Ansi lumens, a contrast of 500:1 and an XGA 1024 x 768 resolution. With a projection ratio of just 0.37:1, this projector never gets in the way. For a 2m wide image, the projector needs to be just 74 cm away from the screen. On the market since 2010, the model is no longer offered by the manufacturer Dukane.

3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen

2500 / 2000 im Eco Mode

833 Lux (bei 200 cm Screen)

Contrast

500:1 full on/off

500:1 full on/off

Black Level

5,0000 min. Lumen

1,676 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D-Blu-ray | 4K-UHD-Blu-ray

Application

Short Distance | Medium screen width or rooms with little light, max. 100 lumens.

Light Source

220W UHB Lamp

Articel Nr.: 456-8100

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

F=2,1 f=5,1mm

Throw Ratio

0,37:1

Audio

7W Mono

Connections

2 x D-sub 15pin in 1 x out
S-Video in
Cinch Video in
Cinch Stereo in
Mini Jack Audio out
RS232C Din 9 pin in
USB Typ B
RJ45

Ceiling Mounting

Yes

Power

340W

Size WxHxD

397 x 225 x 378 mm (15,6"x8,9"x14,9") 33,76 L/dm³

Operating Noise

33 / 28 dB in Eco Mode

Weight

5,80 kg / 12,79 lbs.

Keystone

Vert.: +/-5° automatisch


Illumination


-

Frequenz

H-sync: 15-106 kHz

V-sync: 50-120 Hz

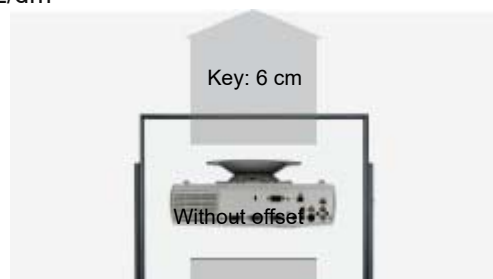

Foot-Lamberts	77 fL / max. 435 cm screen width	
	264 cd/m²	
Features	■ Freeze	
	■ Blank (Black screen button)	
	■ Blackboard Modus	
	■ Eco Mode	
	■ Automatic and manual vertical keystone correction	
	■ Kensington Slot	
	■ Gamma correction	
	■ Password protection	
	■ Remote control with mouse control	
	■ Lan network compatible.	
	■ Overscan adjustable	
	■ Short-throw projector	
	■ Digital Zoom	
	■ De-interlacer with 3:2 pull down..	
Status	2010 Discontinued (EOL) // Last update of the data: 2023-08-04	
Data		
More Details		
	 https://www.projector-database.com/pro/dukaneimagepro8102-en.html	
Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.		