

Eiki EIP 3500

EIKI EIP 3500



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

A brief introduction to the EIP 3500: The Eiki DLP projector offers 3500 Ansi lumens, a contrast of 2000:1 / 1000:1 and an XGA 1024 x 768 resolution. The horizontal and vertical keystone correction provides leeway when setting up. Thanks to the brightness of 3500 Ansi lumens, a picture width of 515 cm is possible. The projector can also handle slightly brighter rooms with a narrower picture width (we recommend a maximum of 343 cm). The projector was launched in 2004 and is no longer sold by the manufacturer.



1 x 0,7" DDR DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Projector

3500

2000:1 / 1000:1 full on/off

1,7500 min. Lumen

Screen

1167 Lux (bei 200 cm Screen)

2000:1 / 1000:1 full on/off

0,584 min. Lumen

XGA 1024 x 768

786.432 Pixel

1280 x 1024 compressed

PAL, PAL-M, PAL-N, PAL-60, SECAM, NTSC, EDTV HDTV 720p, 1080i,
Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

275W Lamp

Articel Nr.: AH-35001

2000 h. 3000 h. in Eco mode

-

Automatic


Powered 1,49

F=2,0-2,5 f=21,3-31,7 mm

1,48-2,2:1

2W Mono

2 x D-sub 15pin in 1 x out
Cinch Video in
S-Video in
Mini Jack in und out
USB Typ B
RS232C Din 9pin
RJ45

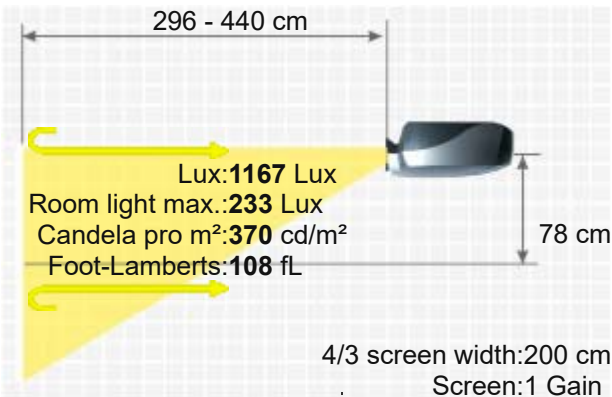




Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
370W
314 x 89 x 282 mm (12,4"x3,5"x11,1") 7,88 L/dm³
32dB

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

4,20 kg / 9,26 lbs.
Vert.: +/-35° automatisch
Hori.: +/-12°
83%
H-sync: 15-70 kHz
V-sync: 43-85 Hz
Range max.: 108 MHz
108 fL / max. 515 cm screen width
370 cd/m²

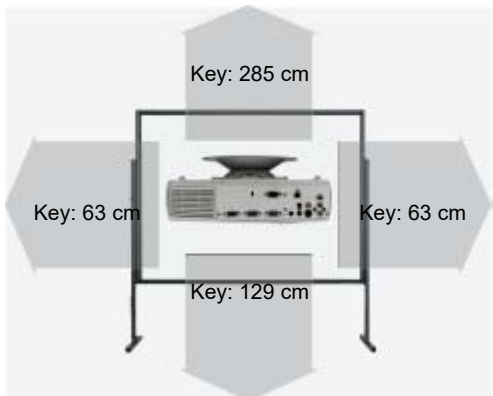

Features

- Freeze
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- sRGB
- Dynamic iris
- Password protection
- Remote control with mouse control
- Control via web browser
- Lan network compatible.
- Digital Zoom
- Auto-focus function
- Quiet thanks to innovative colour wheel motor
- The EIP-3500s colour wheel motor was designed with an air guide instead of a ball bearing.

Optional

Bulb only	NLMP1262
Lamp ruby	Ruby-LMP1262
Lamp original	AH-35001
Compatible lamp	LMP-K1262
Universal Remote original	Fernb-uni-V3

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n1262>
2004 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/eikieip3500-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.