

Eiki LC XC1



EIKI LC XC1



The LC XC1 LCD has 3000 Ansi-Lumen, a contrast of 700:1 and an XGA 1024 x 768 resolution. Including a lens shift and keystone correction function, which provides freedom during installation. An image width of up to 477 cm is possible. However, the image should be smaller in ambient light. We recommend max. 318 cm. This model is no longer offered by Eiki, but is still a popular projector in our database.

Brief Introduction

Beta 2.5

Display Type

3 x 1,3" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

Projector 3000

Screen 1000 Lux (bei 200 cm Screen)

Contrast

700:1 full on/off

Screen 700:1 full on/off

Black Level

4,2857 min. Lumen

Screen 1,435 min. Lumen

Lens shift

Vert.: +/-50%

Resolution

XGA 1024 x 768
786.432 Pixel

Video Modes

NTSC, PAL, SECAM HDTV 1080i-50, 1080i-60, 1035i, 70i/p, 480i/p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

250W NSH Lamp
Articel Nr.: 610 285 4824

Light Life

1000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 1,29

Objective

F=1,82-2,37 f=48,8-62,8 mm

Throw Ratio

1,82-2,37:1

Audio

2W Stereo

Connections

DVI in
Mini jack in
3 x Cinch Video in
S-Video in
5 x BNC RGBHV in
2 x Cinch Stereo in
1 D-sub 15pin in 1 x out

Ceiling Mounting

Yes

Power

360W

Size WxHxD

450 x 370 x 630 mm (17,7"x14,6"x24,8") 104,9 L/dm³

Operating Noise

39dB

Weight

13,60 kg / 29,98 lbs.

Keystone

Vert.: +/-30°

Illumination


90%

Frequenz

H-sync: 15-100 kHz

V-sync: 50-100 Hz

Range max.: 180 MHz

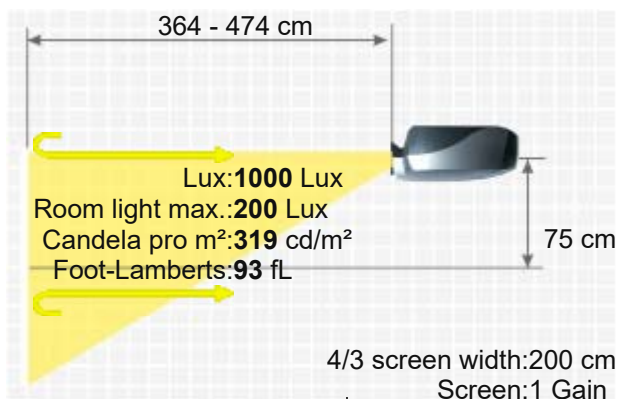

Foot-Lamberts

93 fL / max. 477 cm screen width

319 cd/m²

Features

■ Lens shift Funktion

■ Freeze

■ Kensington Slot

■ Remote control with laser pointer und mouse control

■

Optional

Lamp ruby

Ruby-LMP3481

Lamp original

610-285-4824 / LMP28 / ET-SLMP28

Compatible lamp

LMP-K1334

Universal Remote original

Fernb-uni-V3

Remote control original

645 042 3512 / CXHD

Air filter original

610 285 3872 & 610 287 1685

Order here:

<https://www.hcinema.de/lampen/shop-en.php?id=d1371>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Eiki AH-23131 (T31)	2.39-4.19:1	4.8-8.4 m	50-25%		Powered
Eiki AH-23121 (W31)	1.29-1.81:1	2.6-3.6 m	50-25%		Powered
Eiki 0001-4219	5.73-8.59:1	11.5-17.2 m	50-25%		Manual
Eiki 0001-4218	4.96-8.3:1	9.9-16.6 m	50-25%		Manual
Eiki 0001-4217	2.62-4.77:1	5.2-9.5 m	50-25%		Manual
Fix Optional Lenses					
Eiki AH-32011 (W32)	0.84:1	1.7 m	0.0% Fix		No Zoom
Eiki 0001-4216	1.15:1	2.3 m	0.0% Fix		No Zoom

Status

Data

- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/eikilxc1-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.