

Epoque EFP 6550

EPOQUE EFP 6550



Brief Introduction

Beta 2.5

The Epoque EFP 6550 LCD projector has 2000 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. The projector can illuminate a picture width of up to 389 cm thanks to its 2000 Ansi lumens. In room light, however, the image width should ideally be less than 259 cm. The model is no longer offered by Epoque.

Display Type



3 x 0,9" LCD psi TFT Panels mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

Projector 2000

Screen 647 Lux (bei 203 cm Screen)

Contrast

400:1 full on/off

400:1 full on/off

Black Level

5,0000 min. Lumen

1.63 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

NTSC, PAL, SECAM Pal 60 NTSC 4,43

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

200W SHP Lamp

Light Life

-

Operating Costs

-

Focus

Manual

Zoom

Manual 1,3

Objective

F=1,73-2,1 f=37,8-49,2 mm

Throw Ratio

2,07-2,69:1

Audio

1 x 2W

Connections

Cinch Video in
Stereo Eingang, 3 x Mini Jack
2 x D-sub 15pin in 1 x out
Mausfunktion 1 x PS2 / USB
S Video Eingang

Ceiling Mounting

Yes

Power

300W

Size WxHxD

105 x 325 x 265 mm (4,1"x12,8"x10,4") 9,04 L/dm³

Operating Noise

-

Weight

3,50 kg / 7,72 lbs.

Keystone

-

Illumination

85%

Frequenz

H-sync: 15-91 kHz
V-sync: 43-85 Hz

Foot-Lamberts

60 fL / max. 389 cm screen width
206 cd/m²


Features

- Freeze
- Remote control with laser pointer
- 8x digital zoom, , pointer

Status

- Discontinued (EOL) // Last update of the data: 2023-08-04

Data

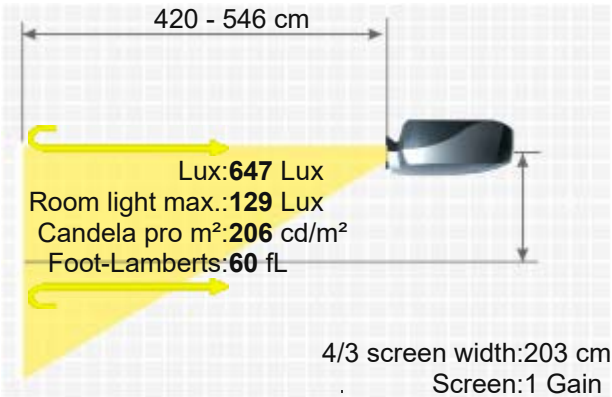



HCinema

<https://www.projector-database.com/pro/epoqueefp6550-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.