

Epson EB-PU1008W/B

EPSON EB-PU1008W/B



Top 10

The EB-PU1008W/B laser LCD has 8500 Ansi lumens, a contrast of 2500000:1 and a resolution. The manufacturer Epson specifies a service life of 20000 hours, which is equivalent to over 13.7 years at 4 hours per day. The integrated lens shift gives freedom when positioning the projector. An image width of up to 937 cm is possible, if the image width is smaller (we recommend max. 625 cm), rooms with residual light are also no problem. If the image width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together. Video signals 1080P and 4K (compressed) are also no problem for the projector.



3 x 0,76" LCD TFT Panel
WUXGA 16/9 Liquid Crystal Display

Projector 8500 / 5950 im Eco Mode
Screen 3778 Lux (bei 200 cm Screen)
Contrast 2500000:1 full on/off
2500000:1 full on/off
Black Level 0,0034 min. Lumen
0,002 min. Lumen

Vert.: +/-67% Hori.: +/-30%
WUXGA 1920 x 1200 2.304.000 Pixel
UHD (4K2K) 3840 x 2160 compressed

Video Modes Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), EDTV 480p, 576p
Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source Laser
Light Life 20000 h. / 30000 h. in Eco Mode

Operating Costs 0,00 € Laser

Focus Powered

Zoom Powered

Objective optional

Throw Ratio optional

Audio -



Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections	HDMI in DVI in D-sub 15pin in USB Typ A, B Mini Jack Audio in und out RJ45 in HDBaseT in
Ceiling Mounting	Yes
Power	535 / 452W in Eco Mode
Size WxHxD	545 x 189 x 436 mm (21,5"x7,4"x17,2") 44,91 L/dm³
Operating Noise	35 / 30 dB in Eco Mode

Weight	16,30 kg / 35,94 lbs.
Keystone	Vert.: +/-45° Hori.: +/-30°
Illumination	85%


Frequenz	-
----------	---

Foot-Lamberts	351 fL / max. 937 cm screen width 1203 cd/m²
---------------	---

- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Kensington Slot
- High Dynamic Range (HDR)
- Warping
- 24/7 continuous operation capable
- Edge Blending
- Password protection
- PJLink™
- Control via web browser
- Lan network compatible.
- Crestron®-Software compatible.
-

Optional	Object lens original	V12H004Y01 / ELPLX01W
	Object lens original	V12H004W05 / ELPLW05
	Object lens original	V12H004UA3 / ELPLU03S
	Object lens original	V12H004U03 / ELPLU03
	Object lens original	V12H004M0B / ELPLM11
	Object lens original	V12H004M0A / ELPLM10
	Object lens original	V12H004M09 / ELPLM09
	Object lens original	V12H004M08 / ELPLM08
	Object lens original	V12H004L08 / NELPLL08
	Object lens original	ELPLU04 / V12H004U04
	Object lens original	ELPLL08 / V12H004L08

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=hc1785>

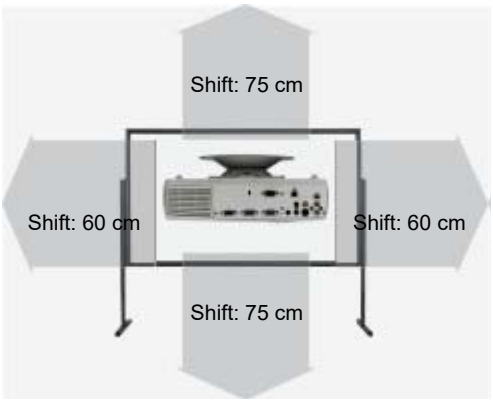

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ELPLW05	1.04-1.46:1	2.1-2.9 m	+/-67%	+/-30%	Powered
ELPLU04	0.87-1.06:1	1.7-2.1 m	+/-67%	+/-30%	Powered
ELPLU03	0.65-0.78:1	1.3-1.6 m	+/-67%	+/-30%	Powered
ELPLM11	4.84-7.39:1	9.7-14.8 m	+/-67%	+/-30%	Powered
ELPLM10	1.81-2.4:1	3.6-4.8 m	+/-67%	+/-30%	Powered
ELPLM09	2.15-3.49:1	4.3-7 m	+/-67%	+/-30%	Powered
ELPLM08	1.45-2.32:1	2.9-4.6 m	+/-67%	+/-30%	Powered
ELPLL08	7.2-10.12:1	14.4-20.2 m	+/-67%	+/-30%	Powered
Fix Optional Lenses					
ELPLX01	0.35:1	0.7 m	+/-17%	+/-10%	No Zoom



More Details



HCinema

<https://www.projector-database.com/pro/epsonebpu1008w-en.html>