



- 2,500 ANSI Lumens
- Native XGA Resolution
- 6.6lbs
- 2 RGB inputs and 1 RGB Output
- Component / Composite / S-Video Inputs
- HDTV Theater Ready
- FCC Class B
- Transition Detector
- Digital Gamma Correction
- Auto Vertical Keystone Correction
- Remote Control with "My Buttons"
- 34dB (Whisper Mode)
- Supplied Soft Case
- My Screen / My Memory
- Whiteboard Mode
- Blackboard Mode
- Approx. 3,000 hrs (Whisper Mode)
- Security Bar
- Kensington Security Slot
- Progressive Scan
- Audio Input / Output
- Input Source Naming

SPECIFICATIONS

Model name		CP-X260 series
Liquid crystal panel structure		0.63" polysilicon active-matrix TFT x 3
Number of pixels		786,432 pixels
Resolution	Video	540 TV lines
	RGB	1024 dots X 768 lines
Colors		16.7 million colors
Aspect ratio		Native 4:3/16:9 compatible
Lens		F1.7 - 1.9 manual zoom 1:1.2
Throw ratio (distance:width)		1.5 - 1.7:1
Lamp		200W UHB
Brightness		2,500 ANSI lumens
Expected lamp life		Approx. 3,000 hrs (Whisper Mode)
		Approx. 2,000 hrs (Natural Mode)
Contrast ratio		500 : 1
Speakers		1W x 1
Power supply		AC100-120V/AC220-240V 50/60Hz
Power consumption		310W
Operating temperature		5°C ~ 35°C (41°F ~ 95°F)
Input signals	RGB	VGA, SVGA, XGA, SXGA, SXGA+, UXGA, MAC13", MAC16"
	Composite video	NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N
	Component video	480i, 576i, 480p, 720p, 1080i
Acoustic noise level		39dB (34dB in whisper mode)
H sync		15kHz ~ 106kHz
V sync		50Hz ~ 120Hz
Vertical keystone correction		Digital keystone +/- 30°
Approvals		UL60950 / C-UL, FCC Part15, Class B
Input/Output terminals	RGB input	Analog RGB
	RGB output	RGB
	Video input	S-video
		Composite video
		Component video
	Audio	Input
		Output
Chassis	Control terminals	
	Dimensions	
	Weight	
	Supplied accessories	
Replace-ment parts	Lamp	
	Remote Control	
	Filter	




Screen Size 4.3		Throw distance	
Diagonal*	Width*	Min*	Max*
30	24	34	41
60	48	70	84
80	64	93	112
100	80	117	140
120	96	140	169
150	120	176	211
200	160	234	282
300	240	352	423

Throw ratio: 1.5 - 1.7:1 (distance:width)

*Measured in inches

CP-X260 Dimensions

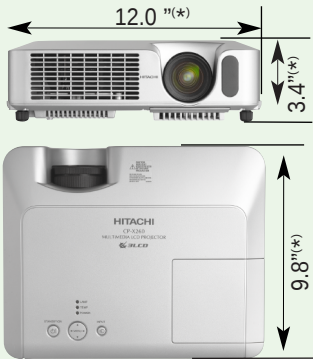

(*) Excluding Lens and Leg