

Nec PV710UL B/W

NEC PV710UL B/W



Top

The Nec PV710UL 3D laser LCD projector has 7100 Ansi lumens, a contrast of 3000000:1 and a WUXGA 1920 x 1200 resolution. The service life is 20000 hours due to the laser, which would be the equivalent of over 13.7 years at 4 hours per day. Including a lens shift and keystone correction function, which provides freedom during installation. 856 cm image width, the projector will be able to illuminate well. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 571 cm here. Even 1080P video signals and 3D are no problem for the projector, and it even has the option of projecting HD 1080P Blu-rays onto the ceiling thanks to 360° projection.

3 x LCD TFT Panel
WUXGA 16/9 Liquid Crystal Display

7100
3000000:1 full on/off
0,0024 min. Lumen
Vert.: +50% -10% Hori.: +/-20%

3156 Lux (bei 200 cm Screen)
3000000:1 full on/off
0,001 min. Lumen

WUXGA 1920 x 1200

2.304.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Laser

20000 h.

0,00 € Laser

Powered

Powered 2,02

-

1,46-2,95:1

-

2x HDMI in
HDBaseT
D-sub 15pin in und out
Mini Jack Audio in und out



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

USB-A in
3,5mm Wired Remote
D-Sub 9 pin (RS-232)
RJ45 in



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
443W Normal / 403W Eco
407 x 164 x 499 mm (16"x6,5"x19,6") 33,31 L/dm³
40 / 31 dB in Eco Mode

Weight
Keystone
Illumination

11,20 kg / 24,25 lbs.
Vert.: +/-30°
Hori.: +/-30°
-

Frequenz


H-sync: 24-100 kHz
V-sync: 50-120 Hz

Foot-Lamberts

293 fL / max. 856 cm screen width
1004 cd/m²

- Real Full HD 3D
- Full HD 1080P compatible
- Direkt Power Off
- Lens shift Funktion
- Blackboard Modus
- Eco Mode
- Warping
- 360° installable
- Password protection
- PJLink™
- Lan network compatible.
- Crestron®-Software compatible.
- Dicom
- AMX
- Lens Memory

Features

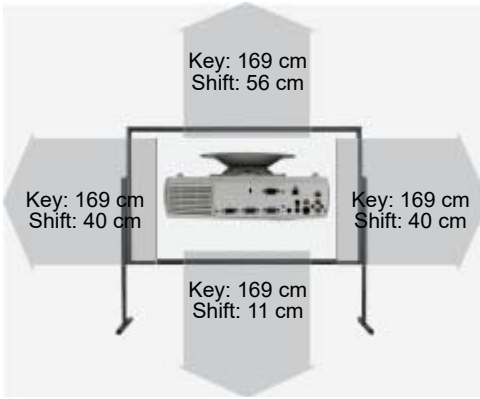

Optionaler Zubehör

	Objektive Original	NP50ZL / 100015855	4.110,34 €
	Objektiv Original	NP15ZL / 60003219	2.595,74 €
	Objektiv Original	NP14ZL / 60003221	EOL €
	Objektiv Original	NP13ZL / 60003217	492,65 €
	Objektiv Original	NP12ZL / 60003220	1.872,81 €
	Objektiv Original	NP11FL / 60003222	EOL €
	Fernbedienung Original	7N901081 / RD-466E / 7N901321 / RD-480E	30,64 €
	Objektiv Original	100015167 / NP44ML	6.236,76 €
	Objektiv Original	100014645 / NP43ZL	2.193,45 €
	Objektiv Original	100014473 / NP41ZL	1.029,20 €
	Objektiv Original	100014472 / NP40ZL	1.935,74 €
	Deckenhalterung Länge 225 mm	Halterung45	85,80 €

Name	Ratio	Optional Lenses			
		Distance	Shift V	Shift H	Zoom
		Zoom Optional Lenses			
NP50ZL	0.6-0.75:1	1.2-1.5 m	50-10%	+/-20%	Powered
NP43ZL	2.99-5.93:1	6-11.9 m	50-10%	+/-20%	Powered
NP41ZL	1.3-3.02:1	2.6-6 m	50-10%	+/-20%	Powered
NP40ZL	0.79-1.11:1	1.6-2.2 m	50-10%	+/-20%	Powered
NP15ZL	4.59-7.02:1	9.2-14 m	50-10%	+/-20%	Manual
NP14ZL	2.9-4.68:1	5.8-9.4 m	50-10%	+/-20%	Manual
NP13ZL	1.46-2.95:1	2.9-5.9 m	50-10%	+/-20%	Manual
NP12ZL	1.16-1.52:1	2.3-3 m	50-10%	+/-20%	Manual
Fix Optional Lenses					
NP44ML	0.32:1	0.6 m	50-10%	+/-20%	No Zoom
NP11FL	0.79:1	1.6 m	50-10%	+/-20%	No Zoom
Status	2022 Current model // Last update of the data: 2025-01-27				

Data



More Details



HCinema

<https://www.projector-database.com/pro/necpv710ul-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.