

Sanyo PLV HD100 (USA)

SANYO PLV HD100 (USA)



The Sanyo PLV HD100 (USA) LCD projector has 5500 Ansi lumens, a contrast of 1000:1 and an HDTV 1920 x 1080 resolution. The integrated lens shift gives freedom when positioning the projector. 5500 Ansi lumens ensure that a picture width of 753 cm is also possible. The projector manages rooms with residual light with a smaller image width, we recommend a maximum of 502 cm. Even 1080P video signals are no problem for the projector. It was launched in 2006 and is no longer offered by the manufacturer Sanyo.



3 x 1,65" LCD TFT Panel mit MLA
HDTV 16/9 Liquid Crystal Display with Micro Lense Array

Projector	5500 / 2750 im singe lamp Mode	2373 Lux (bei 203 cm Screen)
Contrast	1000:1 full on/off	1000:1 full on/off
Black Level	5,5000 min. Lumen	2.379 min. Lumen

Vert.: +/-60% Hori.: +/-10% motorisch max.
HDTV 1920 x 1080

2.073.600 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

4 x 250W UHP Lamp

Articel Nr.: 610 305 1130

1500 h.

14,63% / 0,48 €

Powered

Powered

optional


optional

3W

Input 1:
SDI in

Input 2:
5 X BNC RGBHV in
Cinch stereo out

Input 3:
DVI-I mit HDCP in

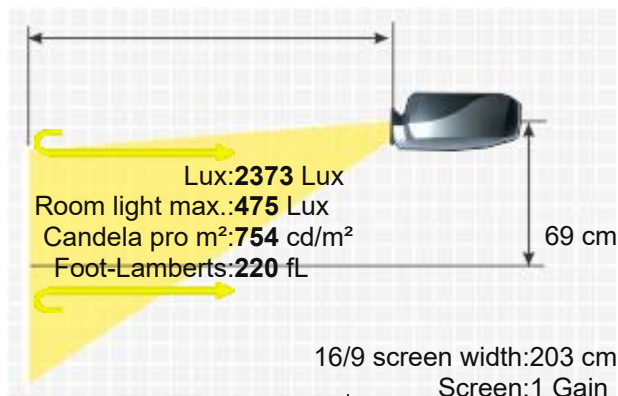

Cinch stereo out

USB Typ B

RS232C Din 9pin in und out

Yes

1500W

581 x 252 x 783 mm (22,9"x9,9"x30,8") 114,64 L/dm³

46dB

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Weight
Keystone
Illumination

37,50 kg / 82,67 lbs.

-

90%

Frequenz

H-sync: 15-120 kHz

V-sync: 50-120 Hz

Range max.: 230 MHz

Foot-Lamberts

220 fL / max. 753 cm screen width

754 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion motorisch max.
- Freeze
- User logo
- Gamma correction
- Remote control with laser pointer
- Optional LAN network compatible.
- Digital Zoom
- Triple noise reduction
- 10-bit digital gamma correction
- De-interlacer with 3:2 pull down.

Features

Please note

Laut Prospekt baugleich HD10 jedoch nicht so hell und keine Keystone korrektur.

Bulb only Osram

NLMP19587

Lamp ruby

Ruby-LMP19587

Optional

Lamp original

610-305-1130 / LMP72 / ET-SLMP72


Compatible lamp

LMP-K1298

Universal Remote original

Fernb-uni-V3

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n3483>

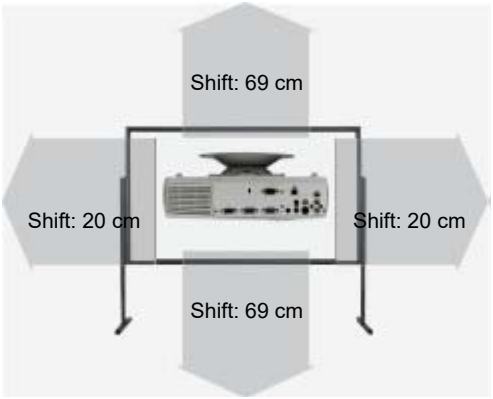

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
LNS-W06	1.1-1.5:1	2.2-3 m	+/-39%	+/-10%	Powered
LNS-W04	1.56-2.05:1	3.2-4.2 m	+/-39%	+/-10%	Powered
LNS-W02Z	1.4-1.83:1	2.8-3.7 m	+/-39%	+/-10%	Powered
LNS-T03	6.23-9.7:1	12.6-19.7 m	+/-50%	+/-10%	Powered
LNS-T02	4.4-6.13:1	8.9-12.4 m	+/-50%	+/-10%	Powered
LNS-S03	2.6-3.52:1	5.3-7.1 m	+/-50%	+/-10%	Powered
LNS-S02Z	2.01-2.63:1	4.1-5.3 m	+/-66.7%	+/-10%	Powered
LNS-M01Z	3.44-4.45:1	7-9 m	+/-50%	+/-10%	Powered
Fix Optional Lenses					
LNS-W03	0.8:1	1.6 m	0.0% Fix		No Zoom
LNS-T01Z	6.9:1	14 m	+/-50%	+/-10%	No Zoom
LNS-W01Z	1.2:1	2.4 m	+/-39%	+/-10%	No Zoom

Status

2006 Discontinued (EOL) // Last update of the data: 2023-08-04

Data





HCinema

<https://www.projector-database.com/pro/sanyoplvd100-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.