

Vivitek D5180HD

VIVITEK D5180HD



The D5180HD 3D BrilliantColor DLP projector from Vivitek has 4500 Ansi-Lumen, a contrast of 3000:1 and a HDTV 1920 x 1080 resolution. The built-in lens shift and keystone correction function provides freedom when setting up. 682 cm image width, the projector will be able to illuminate well. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 455 cm here. The model is also Full HD 1080P compatible. This model is no longer offered by Vivitek.



1 x 0,65" DC3 DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Projector
4500
3000:1 full on/off
1,5000 min. Lumen

Vert.: +50% -20% Hori.: +/-10%
HDTV 1920 x 1080
2.073.600 Pixel

WUXGA 1920 x 1200 compressed
PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Frame Sequential (3D Ready)
Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

330W UHP Lamp

Articel Nr.: 5811116765-SU

1500 h. 2000 h. in Eco Mode

-

Powered

Powered 1,25


F=2,46-2,56 f=22,82-28,49 mm

1,54-1,93:1

-

HDMI 1.3 in
2 x D-sub 15 pin in
S-video in
Cinch Video in
Audio Mini Jack in und out
RJ 45 in
USB
2 x 12V Trigger out

Screen
2000 Lux (bei 200 cm Screen)
3000:1 full on/off
0,667 min. Lumen

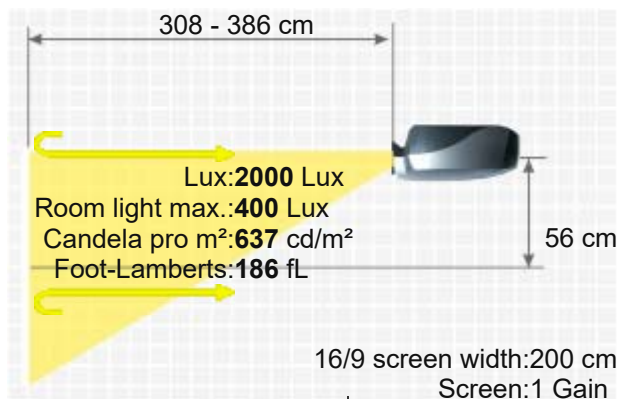

Ceiling Mounting
Power
Size WxHxD
Operating Noise

RS232C
Yes
430 / 370W in Eco Mode
431 x 180 x 343 mm (17"x7,1"x13,5") 26,61 L/dm³
37 / 33 dB in Eco Mode

Weight
Keystone
Illumination

8,60 kg / 18,96 lbs.
Vert.: +/-25°
85%

Frequenz

H-sync: 15-90 kHz
V-sync: 50-85 Hz

Foot-Lamberts

186 fL / max. 682 cm screen width
637 cd/m²


Features

- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Kensington Slot
- BrilliantColor™
- Lan network compatible.

Optional

- Lamp original 5811116765-SU
- Object lens original 5811116225-SU
- Object lens original 5811116224-SU / VL905G
- Object lens original 5811116223-SU
- Remote control 5041825300

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=21186>

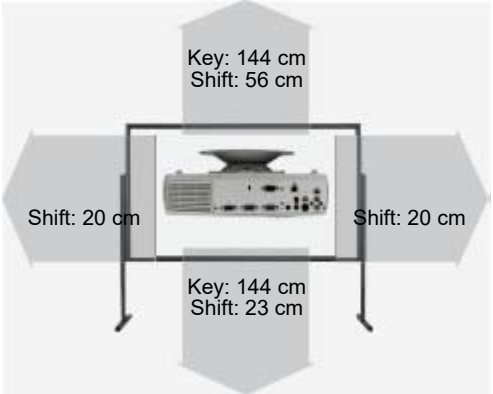

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
5811116224-SU	2-3:1	4-6 m	50-20%	+/-10%	Powered
5811116223-SU	1.54-1.93:1	3.1-3.9 m	50-20%	+/-10%	Powered
Fix Optional Lenses					
5811116225-SU	0.77:1	1.5 m	0.00% Fix		No Zoom

Status
Data

2011 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema
<https://www.projector-database.com/pro/vivitek5180-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.